
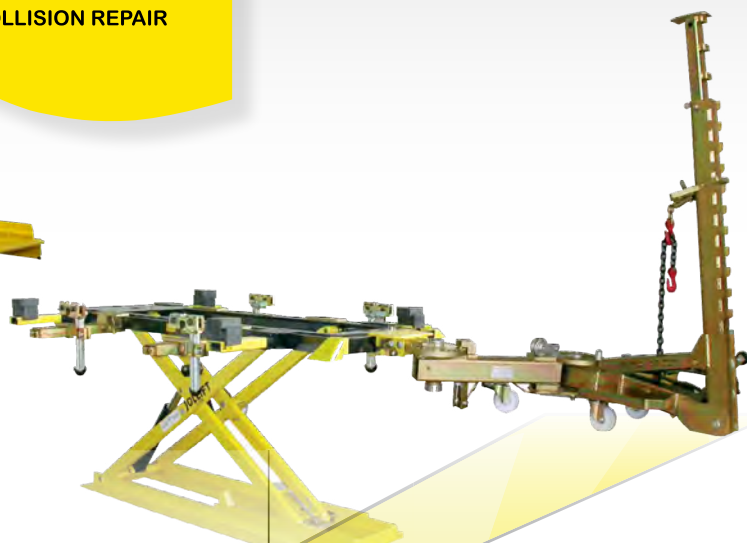


LIFTS

FI.TIM


VEHICLE LIFT - COLLISION REPAIR

FAST BENCHES

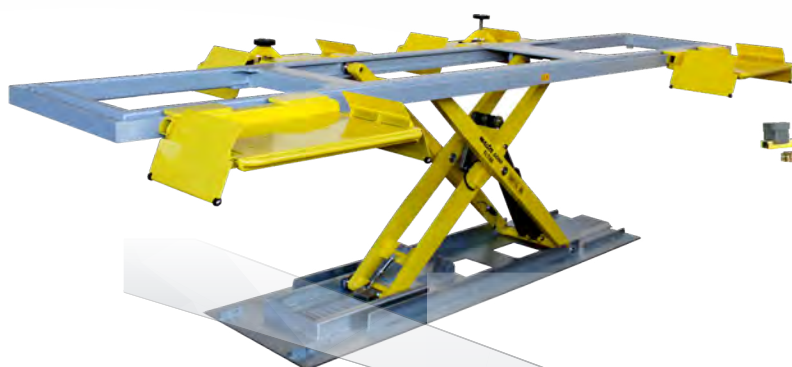

FI.TIM

30
years

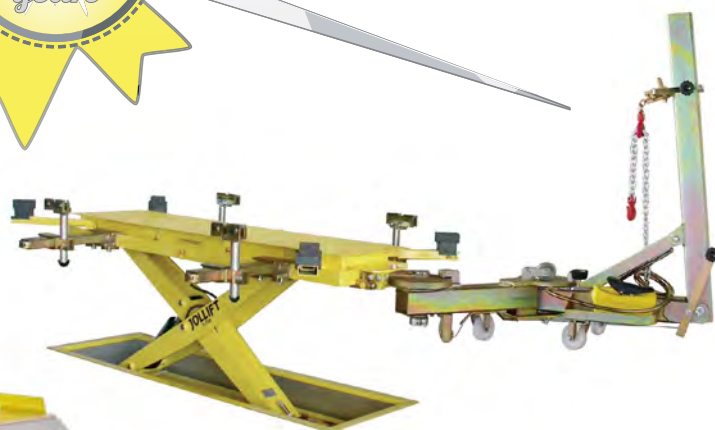














**NEW
INTERNATIONAL
PATENTS**

CATALOGUE

English version

2022

INDEX

A	Presentation		Pag 03
B	Floor-mounted lifts		Pag 04
C	Floor-recessed lifts		Pag 09
D	Lifts with wheel lifting supports flush with the floor		Pag 17
E	MASTER 5000 floor-mounted or floor-recessed lift		Pag 21
F	ATEX-rated lifts for spray booths and prep areas		Pag 24
G	Jollypull smart repair		Pag 26
H	Floor-mounted benches		Pag 31
I	Floor-recessed benches		Pag 41
L	MASTER 5000 floor-mounted or floor-recessed bench		Pag 51
M	450°C Hot dip galvanizing		Pag 57
N	Fixtures		Pag 58
O	Accessories and measuring		Pag 72
P	MLS – STEP Special lifts and benches		Pag 77

FI.TIM, specialized in planning and manufacturing lifts and benches for car body repair, always watches the evolution of the automotive sector and devotes a lot of time and resources to research and innovation to be able to make available to auto body repairers the most up-to-date technologies so as to make car body repair faster and more comfortable.

The many **patents of FI.TIM** accompany the technological evolution of the last 30 years, from **SPAZIOLIFT** lift for heavyduty straightening benches (patent of 1989), via the first floor-recessed **MINIBENCH**, to the **DOUBLE HORIZONTAL ROTATION TRACTION ARM**.

Then the **Power Fi.tim Energy** technology for floor-mounted and floor-recessed low profile lifts and benches, the **JOLLIFAST** and **KITFIX** fixtures, the state-of-the art technology of **MLS** and **STEP**, the most recent new technologies of **JOLLYPULL** and **MASTER 5000**.

The awards received in Germany in 1998 and 2000 are a further guarantee of the quality and solidity of FI.TIM products

FI.TIM products are sold by distributors and specialized wholesalers worldwide. The products in this catalogue represent the largest selection of lifts and benches currently available for fast collision repair with specifications for the most various requirements.



The **POWER FI.TIM ENERGY** system, which is one of the most important **FI.TIM** patents, allows a brilliant performance with less energy consumption. It consists of a compensator of initial travel which operates through a roller on an inclined support. The use of the inclined support requires less lifting power with a consequent smaller current consumption of the motor. It allows to get low-profile lifts with a great lifting capacity already from the initial travel.

It is a device present on all **JOLLIFT** floor-mounted and on some floor-recessed lifts and benches

JOLLIFT 1330**3000 kg max capacity 6615 lb**

96 mm minimum height 3.77"

1300 mm lifting height 51.18"

JOLLIFT 1335**3500 kg max capacity 7717 lb**

105 mm minimum height 4.13"

1300 mm lifting height 51.18"

JOLLIFT MASTER 35**3500 kg max capacity 7717 lb**

105 mm minimum height 4.13"

1640 mm lifting height 64.56"

Main Features**Lifting by rubber blocks and wheels free or by wheel lifting supports**

Standard lifting by rubber blocks and wheels free



Reduced minimum height (96 mm / 3.77" – on JOLLIFT 1330) thanks to the POWER FI.TIM ENERGY patent




3 types of control unit available:


EH = electrohydraulic

PH = pneumo-hydraulic

PE7 = pneumo-electrohydraulic

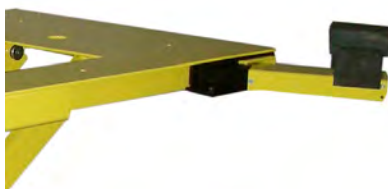

The telescopic lifting supports are inside the footprint area of the vehicle that has been raised, for the safety of people working near the vehicle.

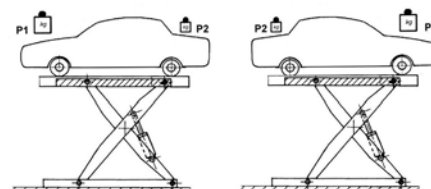


Reversible load, the heaviest side of the vehicle (motor side) on both sides of the lift

Safety devices

Mechanical safety catch



Emergency stop button with key against non-authorized use



Outer and inner wheel stops on the wheel lifting supports

Main optional accessories



AUT - Automatic device for opening and closing the lifting supports on 1335 – Master 35 models



4P18 – Wheel lifting supports with crossbars available as an option on all floor-mounted models. Driving over the lift becomes faster and the vehicle structure does not flex



RUB high / adjustable pads



B90 pads remain fastened to the lifting support



Safety device operating during lowering with acoustic signal activation (in combination with wheel lifting supports)



■ JOLLIFT 1330

3000 kg max capacity 6615 lb

96 mm minimum height 3.77"

1300 mm lifting height 51.18" (to the top of rubber pad)




EH
Electrohydraulic



PH
Pneumohydraulic



PE7
Pneumo-electrohydraulic

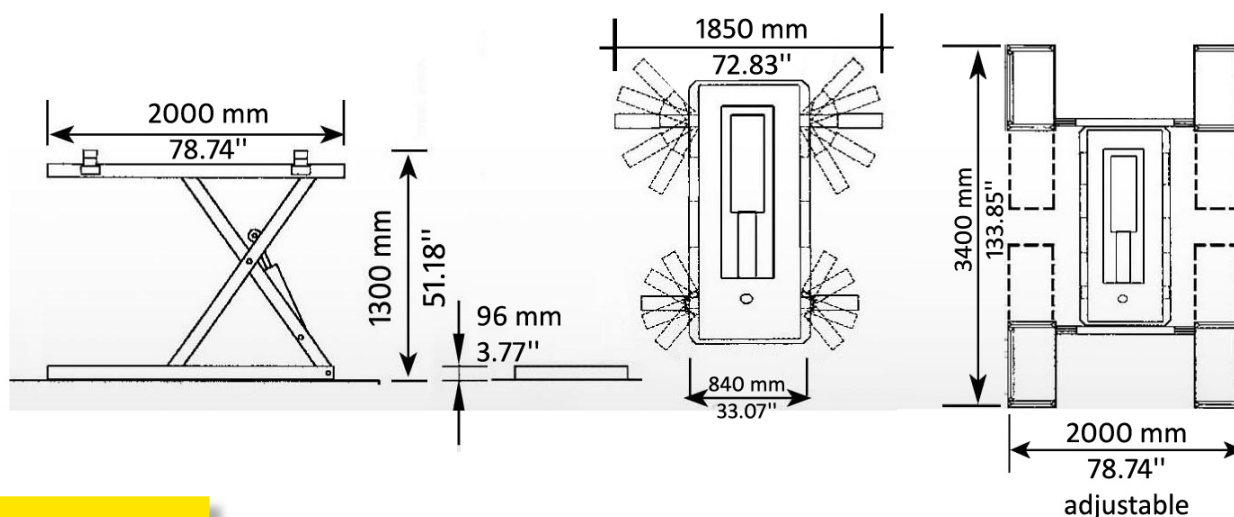

■ JOLLIFT 1335

3500 kg max capacity 7717 lb

105 mm minimum height 4.13"

1300 mm lifting height 51.18" (to the top of rubber pad)




EH
Electrohydraulic



PH
Pneumohydraulic



PE7
Pneumo-electrohydraulic

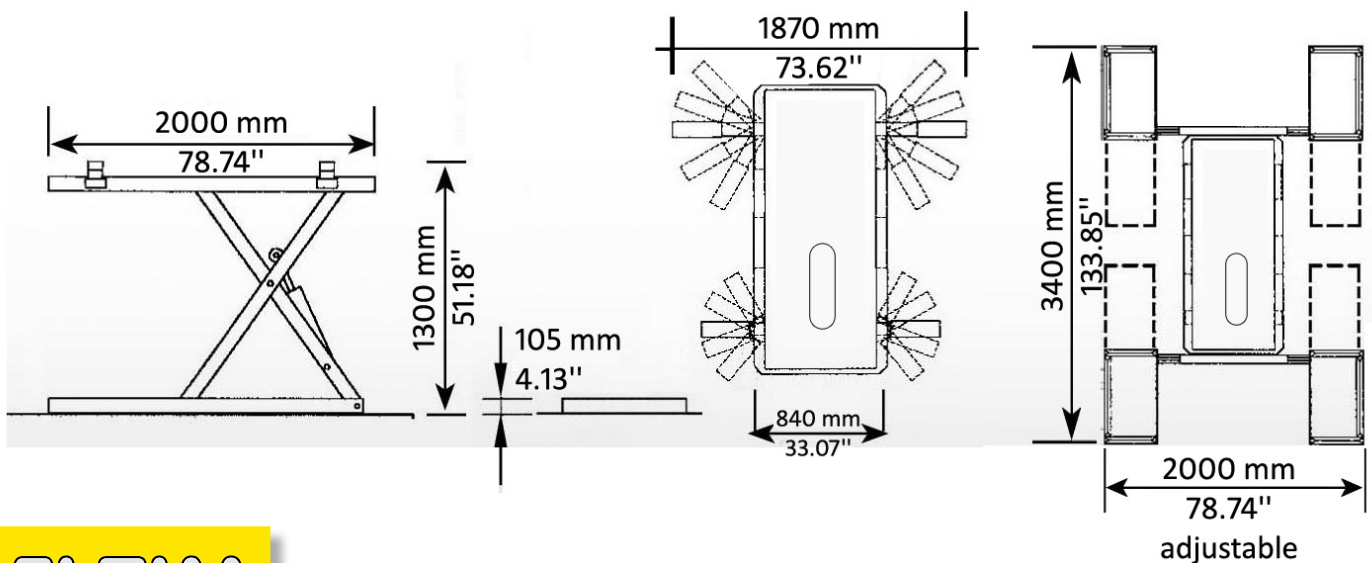

■ JOLIFT MASTER 35

3500 kg max capacity 7717 lb

105 mm minimum height 4.13"


1640 mm lifting height 64.56" (to the top of rubber pad)



EH
Electrohydraulic



PE7
Pneumo-Electrohydraulic

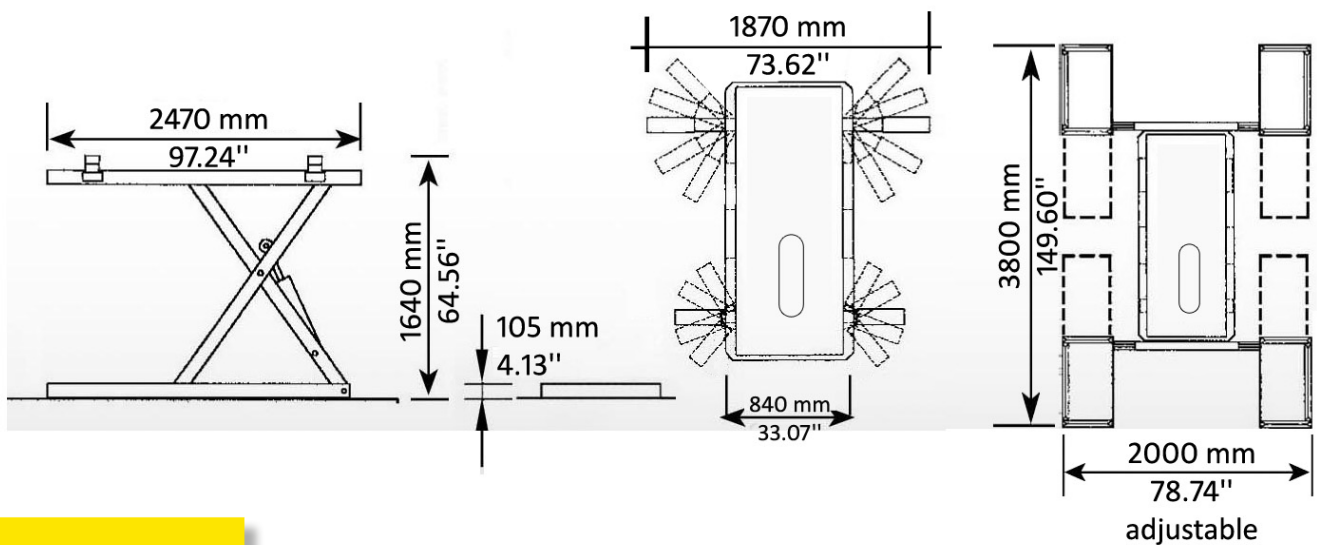

JOLLIFT 1200

3000 kg max capacity 6615 lb

1100 mm lifting height 43.30"

260 mm pit depth 10.23"

JOLLIFT 1235

3500 kg max capacity 7717 lb

JOLLIFT COMPACT 11-196-30

3000 kg max capacity 6615 lb

1200 mm lifting height 47.24"

110 mm pit depth 4.33"

JOLLIFT COMPACT 11-196-35

3500 kg max capacity 7717 lb

JOLLIFT 1630

3000 kg max capacity 6615 lb

1480 mm lifting height 58.26"

260 mm minimum pit depth 10.23"

JOLLIFT 1635

3500 kg max capacity 7717 lb

1480 mm lifting height 58.26"

260 mm pit depth 10.23"

JOLLIFT 1835

3500 kg max capacity 7717 lb

1680 mm lifting height 66.14"

260 mm pit depth 10.23"

Main features**Lifting by rubber blocks and wheels free or by wheel lifting supports**

Standard lifting by rubber blocks and wheels free



Non-slip diamond plate



EH




PH



PE

3 types of control unit available:

EH = electrohydraulic, PH = pneumatic-hydraulic, PE = pneumatic-electrohydraulic

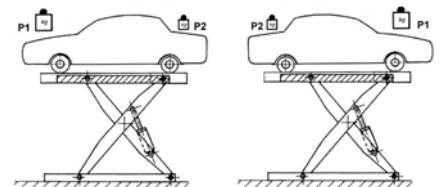

Reversible load, the heaviest side of the vehicle (motor side) on both sides of the lift

Safety devices



Mechanical safety catch



Emergency stop button with key against non-authorized use



Outer and inner wheel stops on the wheel lifting supports



Safety device stopping the lift on getting out of the pit, against damage to the underside of a vehicle, and on getting into the pit (on PH and PE versions on getting out of the pit)



The telescopic lifting supports are inside the footprint area of the vehicle that has been raised, for the safety of people working near the vehicle.

Main optional accessories



AUT - Automatic device for opening and closing the lifting supports



4P18 – wheel lifting supports with crossbars available as an option on all floor-recessed models. Driving over the lift becomes faster and the vehicle structure does not flex



Tamponi RUB high / adjustable pads



Safety device operating during lowering with acoustic signal activation (in combination with wheel lifting supports)



■ JOLLIFT 1200

3000 kg max capacity 6615 lb
 0 mm minimum height 0"
 1100 mm lifting height 43.30"
 (to the top of rubber pad)



EH
 Electrohydraulic

■ JOLLIFT 1235

3500 kg max capacity 7717 lb
 0 mm minimum height 0"
 1100 mm lifting height 43.30"
 (to the top of rubber pad)



PH
 Pneumohydraulic



PE7
 Pneumo-electrohydraulic



Minimum pit dimensions:

Length = 2000 mm / 78.74"

Width = 660 mm / 25.98" (with pit surround)

Width = 640 mm / 25.19" (without pit surround)

Depth = 260 mm / 10.23"

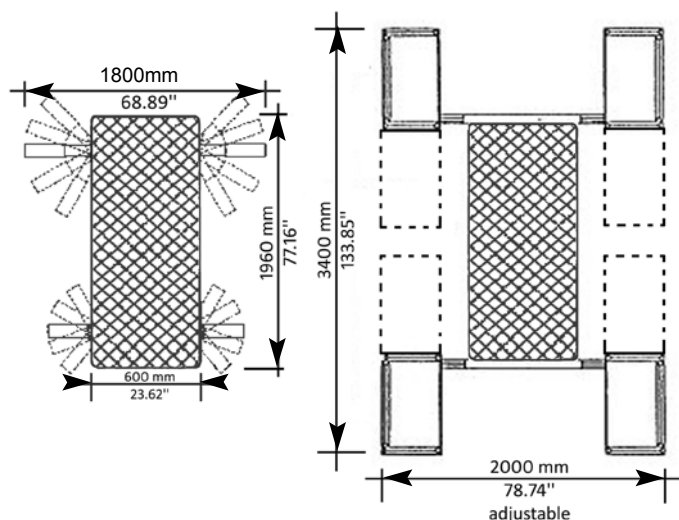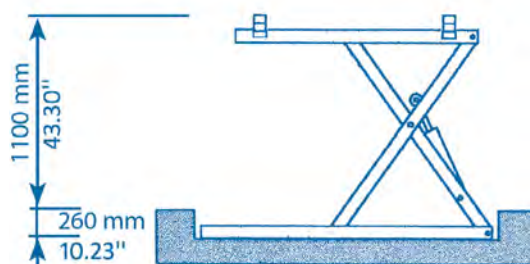

■ JOLLIFT COMPACT 11-196-30

3000 kg max capacity 6615 lb
 0 mm minimum height 0"
 1200 mm lifting height 47.24"
 (to the top of rubber pad)



EH
Electrohydraulic

■ JOLLIFT COMPACT 11-196-35

3500 kg max capacity 7717 lb
 0 mm minimum height 0"
 1200 mm lifting height 47.24"
 (to the top of rubber pad)



PH
Pneumohydraulic






PE7
Pneumo-electrohydraulic

Minimum pit dimensions:

Length = 2000 mm / 78.74"

Width = 720 mm / 28.35 "

Depth = 110 mm / 4.33"

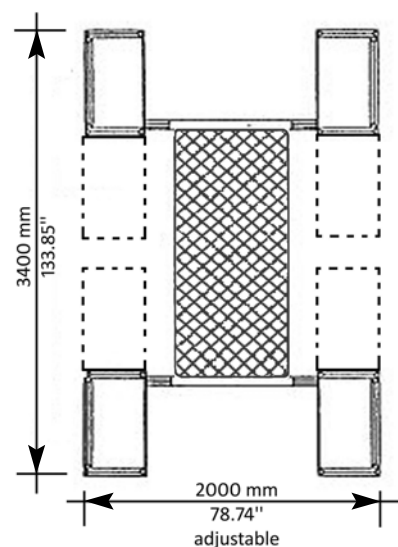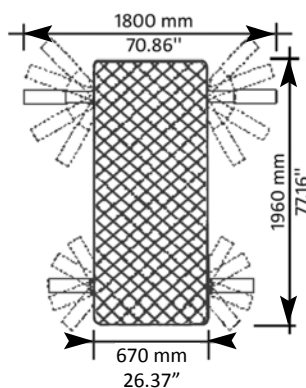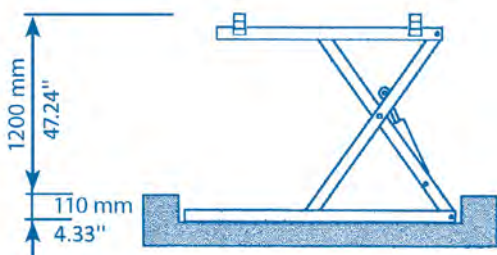

FI.TIM
 LIFTS & BENCHES - COLLISION REPAIR

■ JOLLIFT 1630

3000 kg max capacity 6615 lb

0 mm minimum height 0"

1480 mm lifting height 58.26"

(to the top of rubber pad)



EH

Electrohydraulic



PE7

Pneumo-electrohydraulic




Minimum pit dimensions:

Length = 2250 mm / 88.58"

Width = 720 mm / 28.34" (with pit surround)

Width = 680 mm / 26.77" (without pit surround)

Depth = 260 mm / 10.23"

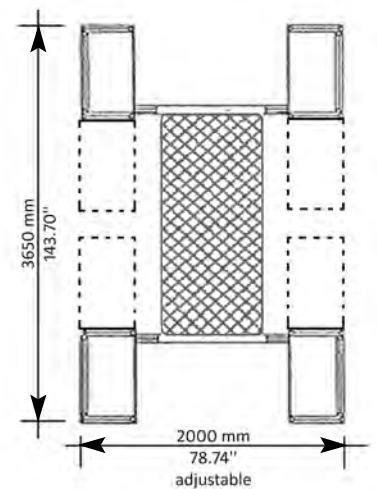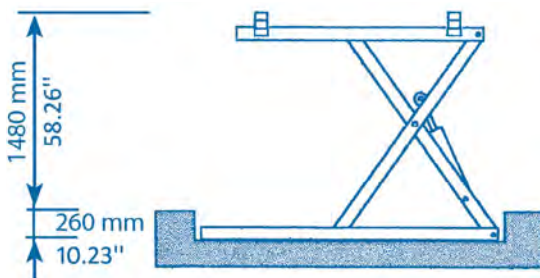

■ JOLIFT 1635

3500 kg max capacity 7717 lb

0 mm minimum height 0"

1480 mm lifting height 58.26"

(to the top of rubber pad)



EH
Electrohydraulic






PE7
Pneumo-electrohydraulic

Minimum pit dimensions

Length = 2250 mm / 88.58"

Width = 720 mm / 28.34"

Depth = 260 mm / 10.23"

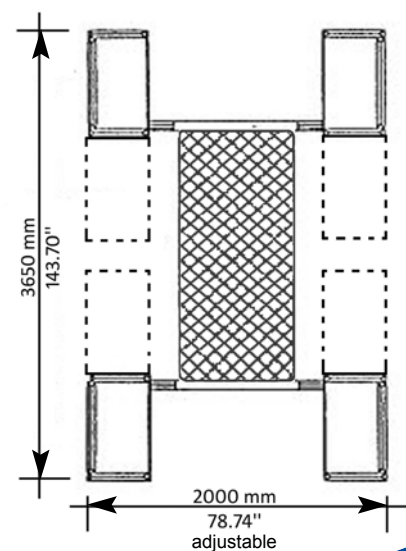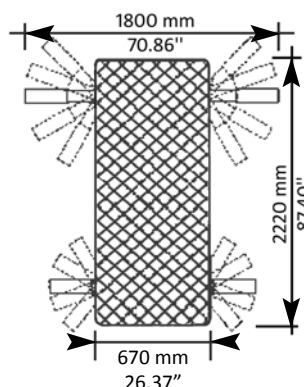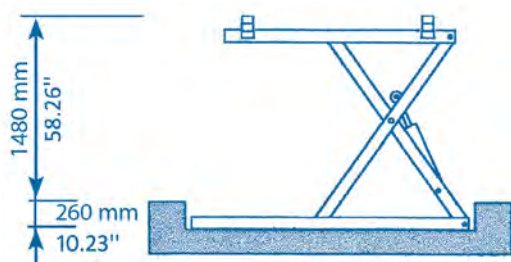

■ JOLIFT 1835

3500 kg max capacity 7717 lb

0 mm minimum height 0"

1680 mm lifting height 66.14"
(to the top of rubber pad)



EH
Electrohydraulic






PE7
Pneumo-electrohydraulic

Minimum pit dimensions:

Length = 2250 mm / 88.58"

Width = 720 mm / 28.34"

Depth = 260 mm / 10.23"

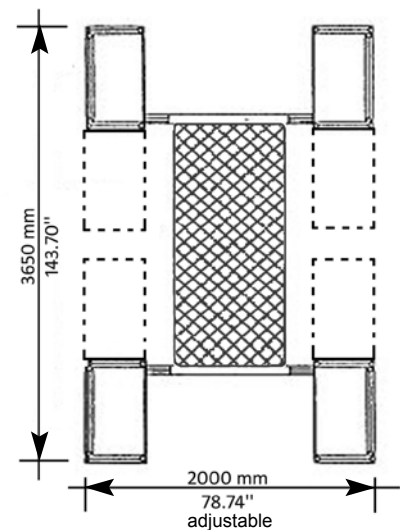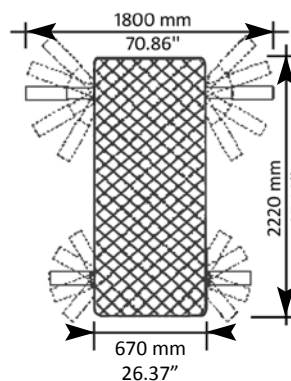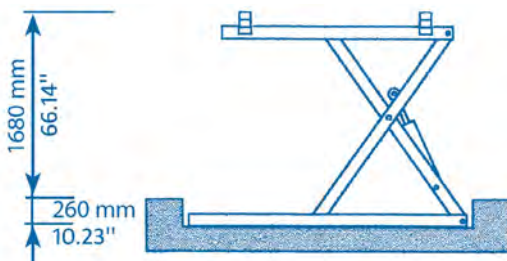

JOLIFT MASTER L8**3000 kg maximum capacity 6615 lb**

1440 mm lifting height 56.69"

130 mm minimum pit depth 5.11"

JOLIFT 30 JP**3000 kg maximum capacity 6615 lb**

1000 mm lifting height 39.37"

260 mm pit depth 10.23"


JOLIFT 35**3500 kg maximum capacity 7717 lb**

1360 mm lifting height 53.54"

300 mm pit depth 11.81"

Main features**Lifting by wheel lifting supports**

Standard lifting by wheel lifting supports

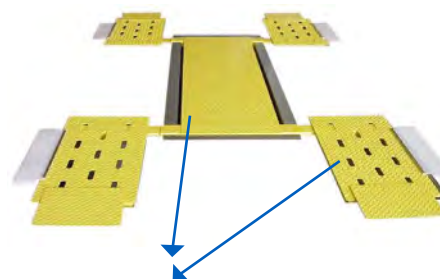

Non-slip diamond plate



EH




PH



PE

3 types of control unit available:
 EH = electrohydraulic, PH = pneumatic-hydraulic (on JO.30JP),
 PE7 = pneumatic-electrohydraulic

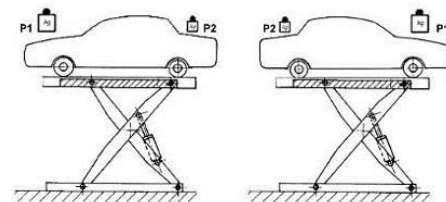

Reversible load, the heaviest side of the vehicle (motor side) on both sides of the lift

Safety devices

Safety device operating during lowering with acoustic signal activation (on JO.30JP and JO.35)




Mechanical safety catch



Emergency stop button with key against non-authorized use



Safety device operating during lowering with acoustic signal activation (on JO.MASTER L8)

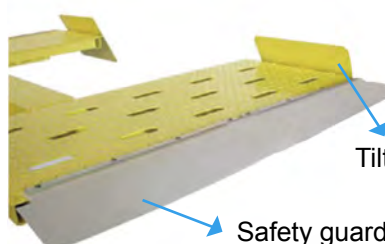

Tilting safety wheel lifting supports


Safety guard

JOLLIFT MASTER L8

3000 kg max capacity 6615 lb

0 mm minimum height 0"



1440 mm lifting height 56.69"

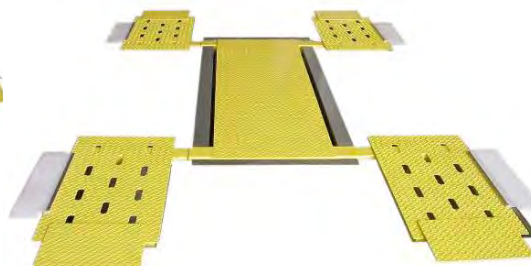

EH
Electrohydraulic



PE7
Pneumo-electrohydraulic

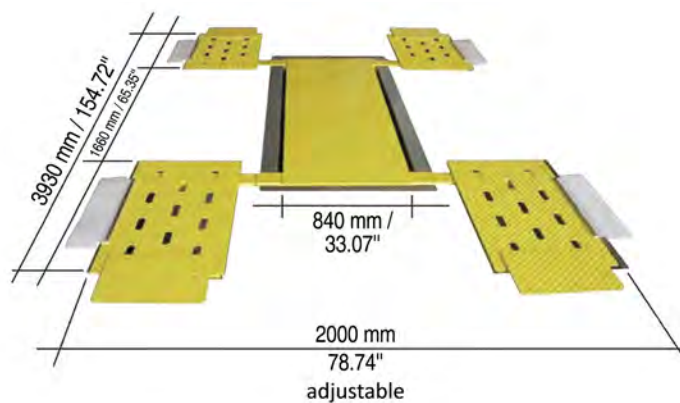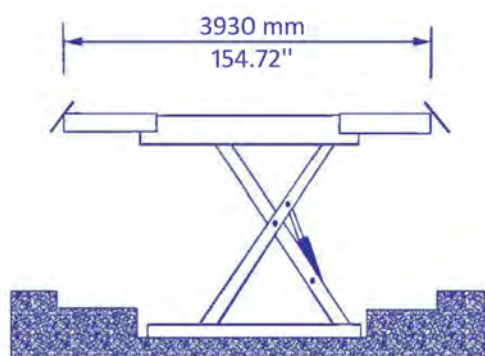


■ JOLLIFT 30 JP

3000 kg max capacity 6615 lb

0 mm minimum height 0"

1000 mm lifting height 39.37"

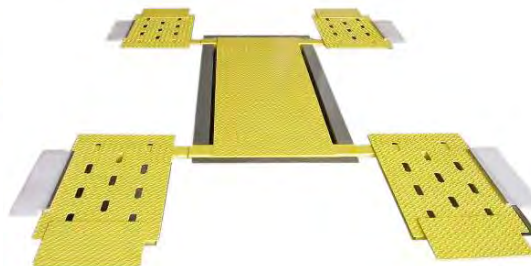



EH
Electrohydraulic



PH
Pneumohydraulic



PE7
Pneumo-electrohydraulic

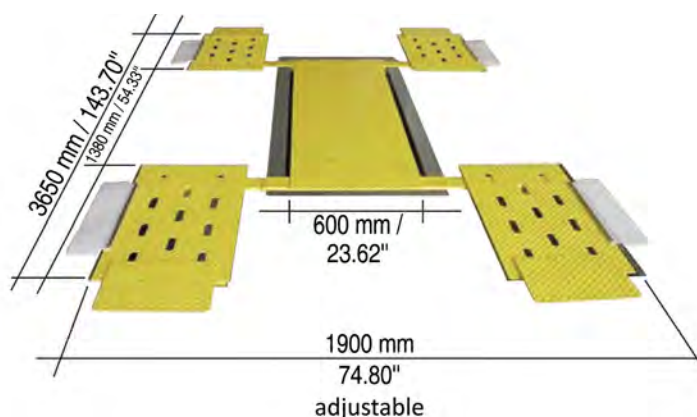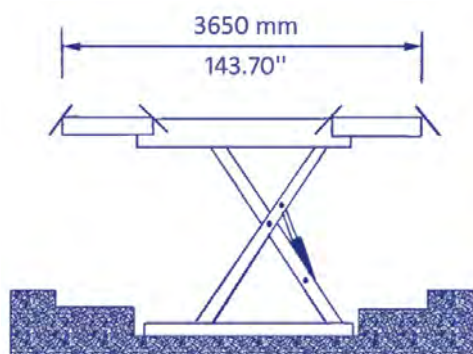

JOLLIFT 35

3500 kg max capacity 7717 lb

0 mm minimum height 0"



1360 mm lifting height 53.54"



EH
Electrohydraulic



PE7
Pneumo-electrohydraulic

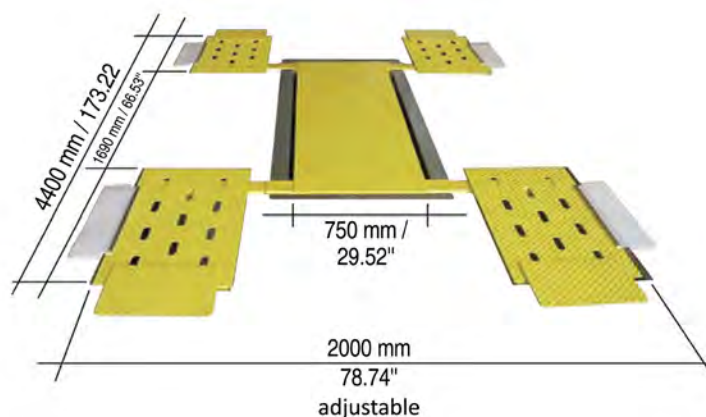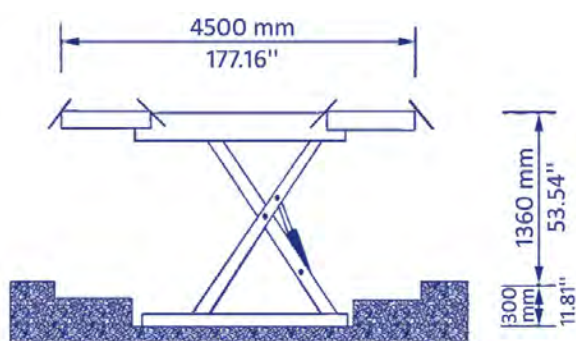

LIFT FOR CARS – VANS - PICKUPS - SUVs – COMMERCIAL VEHICLES - MOTORHOMES

MASTER 5000.ES FLOOR-MOUNTED

5000 kg max capacity 11.000 lb

120 mm minimum height 4.72" (to the upper platform)
1380 mm lifting height 54.33" (to the lifting support on which the wheel sits)

MASTER 5000.IN FLOOR-RECESSED

5000 kg max capacity 11.000 lb

0 mm minimum height (to the upper platform)
1380 mm lifting height 54.33" (to the lifting support on which the wheel sits)

Main features


Same supports for raising by the wheels and by the rocker panel with rubber pads



Standard lifting by wheel lifting supports



EH = electrohydraulic control unit with remote control

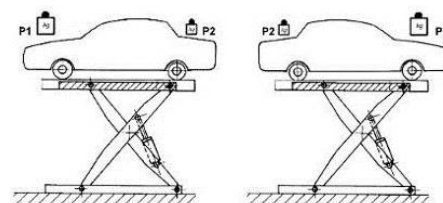

Reversible load, the heaviest side of the vehicle (motor side) on both sides of the bench

Safety devices



Mechanical safety catch



Emergency stop button with key against non-authorized use



Outer and inner wheel stops on the wheel lifting supports



Safety device operating during lowering with acoustic signal activation



Main optional accessories



Adjustable low rubber pads for cars



Adjustable high rubber pads for commercial vehicles

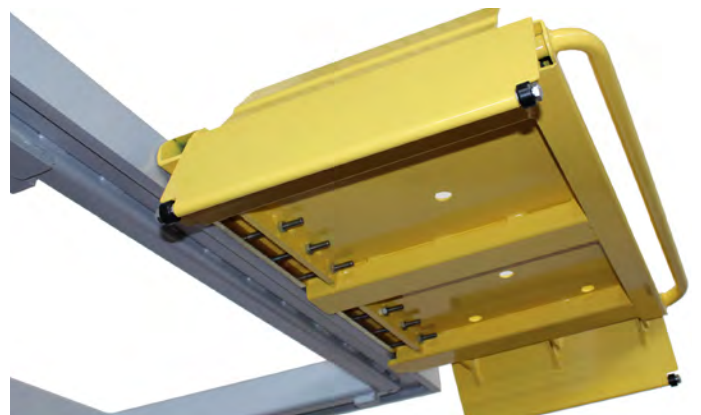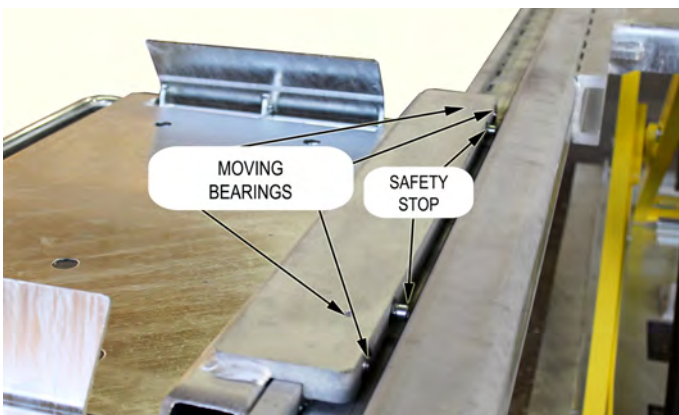

Bearings for moving the wheel lifting supports easily

The inclination / alignment of the wheel lifting supports can be adjusted



LOAD TEST ON WHEELS
+ 50% OVERLOAD
EN 1493 EUROPEAN STANDARD

2 PORTIONS ON ONE SIDE
1 PORTION ON THE OPPOSITE SIDE




LOAD TEST ON RUBBER BLOCKS AND
+ 50% OVERLOAD
EN 1493 EUROPEAN STANDARD

3 PORTIONS ON ONE SIDE
1 PORTION ON THE OPPOSITE SIDE


New registered patent

**MASTER 5000.IN
FLOOR RECESSED**

- 0 mm minimum height 0" (to the upper platform)
- 50 mm minimum height 1.96" (to the lifting support on which the wheels sits)
- 1330 mm lifting height 52.36" (to the upper platform)
- 1380 mm lifting height 54.33" (to the lifting support on which the wheels sits)

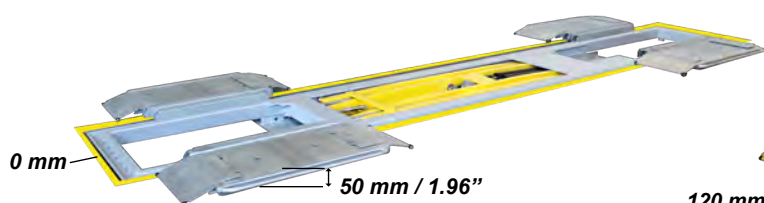**MASTER 5000.ES
FLOOR MOUNTED**




- 120 mm minimum height 4.72" (to the upper platform)
- 50 mm minimum height 1.96" (to the lifting support on which the wheels sits)
- 1450 mm lifting height 57.08" (to the upper platform)
- 1380 mm lifting height 54.33" (to the lifting support on which the wheels sits)

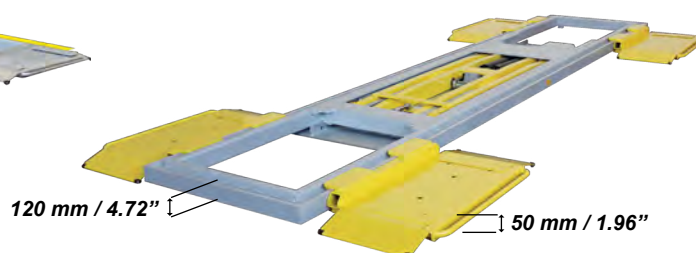**Minimum pit dimensions:**

Length: = 5060 mm / 199.21

Width: = 1130 mm / 44.48"

Depth: = 130 mm / 5.11"

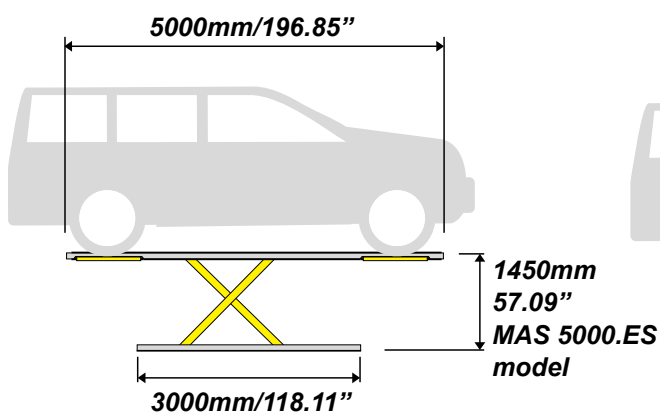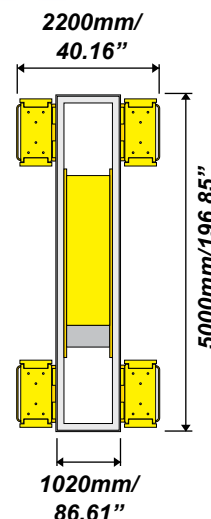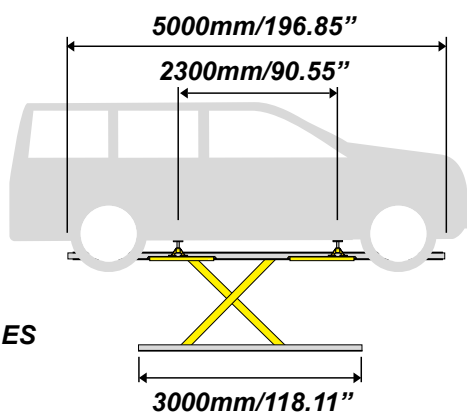**5000 KG / 11.000 LB
CAPACITY****BY THE WHEELS****BY THE RUBBER PADS**

Floor-mounted lifts**Lifting by rubber blocks and wheels free or by wheel lifting supports****JOLLIFT 1330 AXPB****JOLLIFT 1330 AXPE7****JOLLIFT 1335 AXPE7****JOLLIFT MASTER 35 AXPE7***Dimensions and features in sector B (floor-mounted lifts)***Floor-recessed lifts****Lifting by rubber blocks and wheels free or by wheel lifting supports****JOLLIFT 1200/1235 AXPB****JOLLIFT 1200/1235 AXPE7****JOLLIFT COMPACT****11-196-30/35 AXPB****JOLLIFT COMPACT****11-196-30/35 AXPE7****JOLLIFT 1630 AXPE7****JOLLIFT 1635 AXPE7***Dimensions and features in sector C (floor-recessed lifts)***Lifts with wheel lifting supports flush with the floor****Lifting by wheel lifting supports****JOLLIFT MASTER L8 AXPE7****JOLLIFT 30JP AXPB****JOLLIFT 30JP AXPE7****JOLLIFT 35 AXPE7***Dimensions and features in sector D
(lifts with wheel lifting supports flush with the floor)*

Destination of use

The **AX / AXPE7** model is a lifting machine also usable in environments where explosive atmospheres can occasionally develop due to gas, steam, mists or powders caused by mixtures used to paint cars. It is built to work in accordance with the constructional parameters set with a view to guarantee an adequate protection and a normal safety level.

It is designed to obey the rules in Directive 2014/34/UE (ATEX) regarding equipment usable in potentially explosive atmospheres, with the following modalities:


Equipment fit for being in contact with a potentially explosive atmosphere classified as a zone 2 or 22 according to directive 1999/92/CE: equipment of group II, category 3 G D (gas and powder), class of temperature T6 (85° C).

The potential primer of the explosive mixture is averted as follows:

- The material and components used for the construction are qualified and fit for use in atmosphere classified as a zone 2 or 22.
- The accumulation of dangerous electrostatic charges is averted with proper building shrewdnesses.

Registered patent



Jollypull is Smart Repair equipment which is mainly used with wheel lifting supports

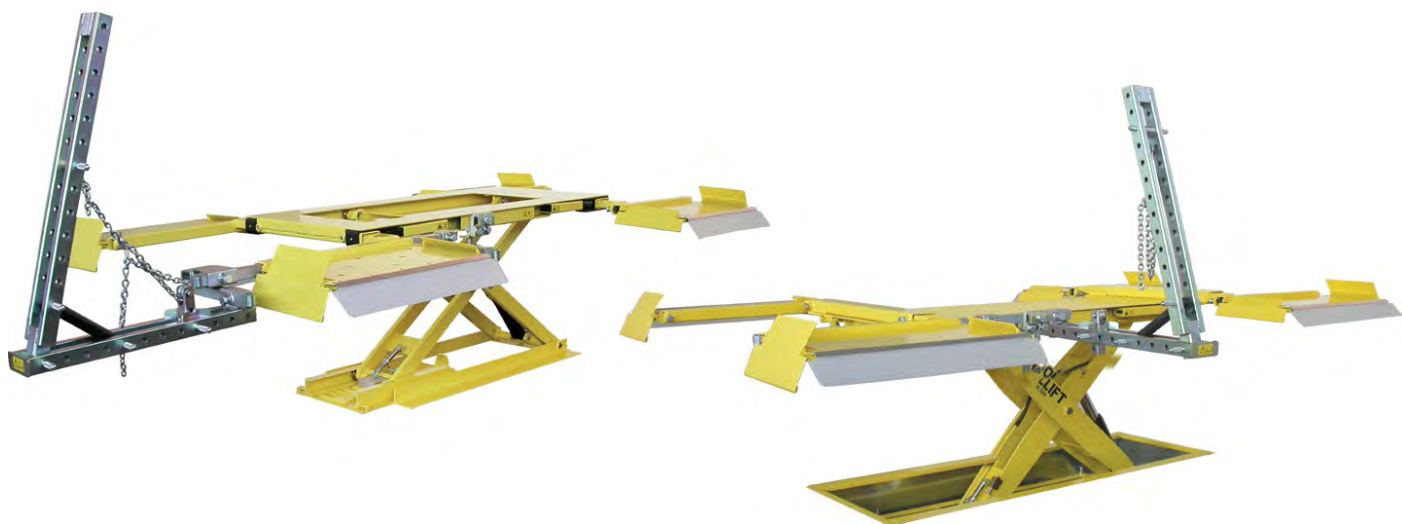

Fast and comfortable, it works in conjunction with JOLLIFT lifts and benches
Suitable for Smart Repair with many different uses

cylinder with return spring

ARCO (optional accessory)

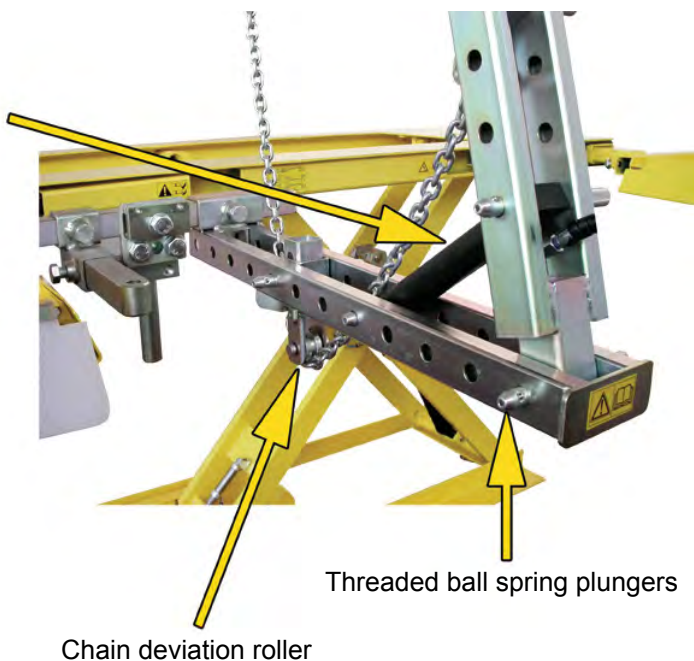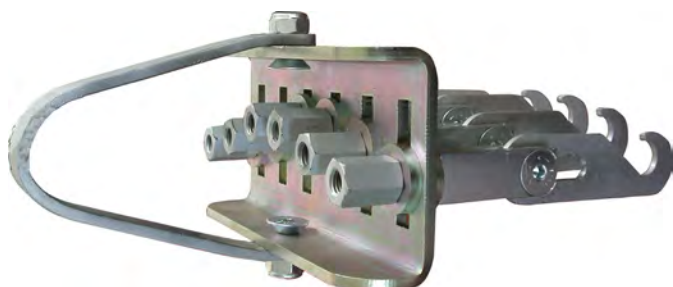


Chain deviation roller

Threaded ball spring plungers

Multiple hook for pulling curvilinear and straight parts.
It fits well with curvilinear parts of cars like for instance fenders / wheelhouses and others

Jollypull Smart Repair

Fast and comfortable assembling

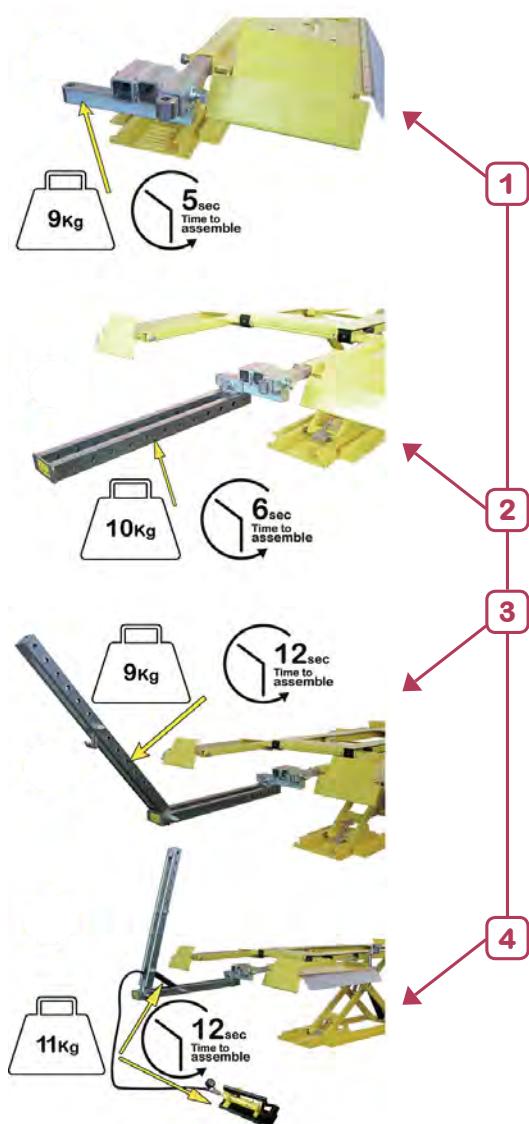

Jollypull assemblies



Jollypull A assembly for wheel lifting supports




Jollypull B.P. assembly for benches

■ Equipment and use

jollypull - A

For use with wheel lifting supports on Jollift lifts and benches

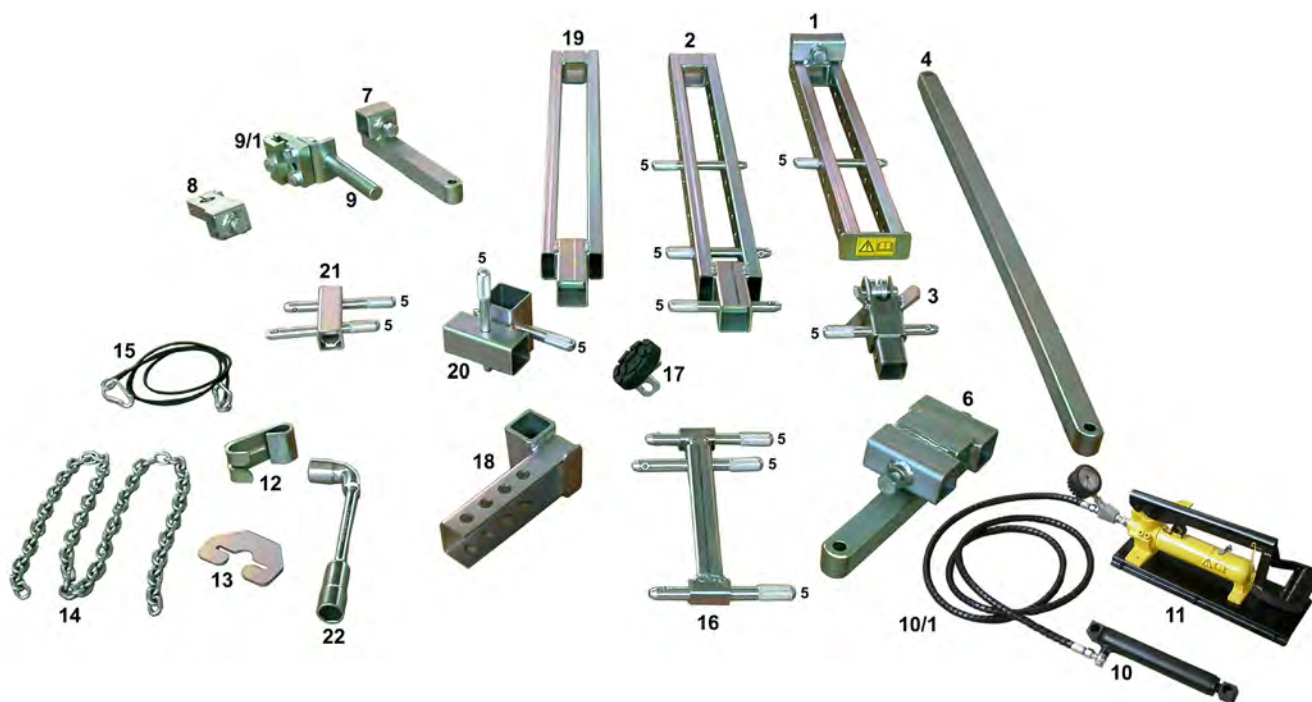



1. Horizontal part (1 pc)



2. Vertical part (1 pc)



3. Chain deviation roller complete assembly (1 pc)

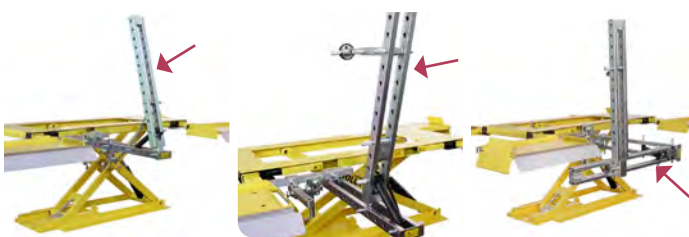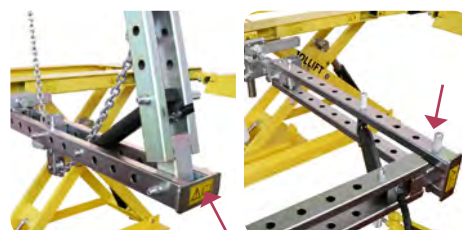



6. Traction arm attachment support— double (1 pc)



7. Clamp bracket support (1 pc)



8. Clamp support (1 pc)



9. Shaft with clamp attachment (1 pc)


9/1. SC19 clamp (1 pc)



16. Telescopic support (1 pc)



17. Rubber pad (1 pc)

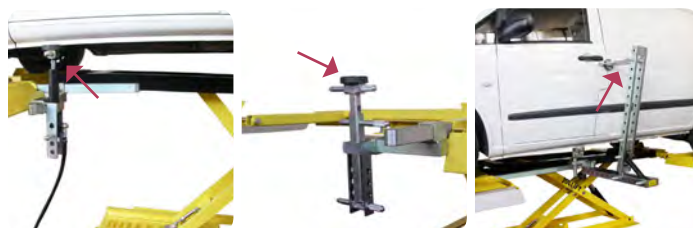




18. Lifting support (1 pc)



19. Vertical extension (1 pc)



20. 90° vertical attachment support (1 pc)




21. Vertical extension support (1 pc)



10. Cylinder with fitting (1 pc)

10/1. Hydraulic hose (1 pc)

11. Pump with fitting and pressure gauge (1 pc)



JOLLIFT 1330 BENCH

3000 kg maximum capacity 6615 lb

100 mm minimum height 3.94"

1300 mm lifting height 51.18"

JOLLIFT 1335 BENCH

3500 kg maximum capacity 7717 lb

105 mm minimum height 4.13"

1300 mm lifting height 51.18"

JOLLIFT MASTER BENCH 35

3500 kg maximum capacity 7717 lb

105 mm minimum height 4.13"


1640 mm lifting height 64.57"

Main features**Lifting by rubber blocks and wheels free or by wheel lifting supports**

Reduced minimum height (100 mm / 3.94" – on JOLLIFT 1330 Bench) thanks to the POWER FI.TIM ENERGY patent




Reduced length of the upper platform for full access of the lower, front and back side of the vehicle

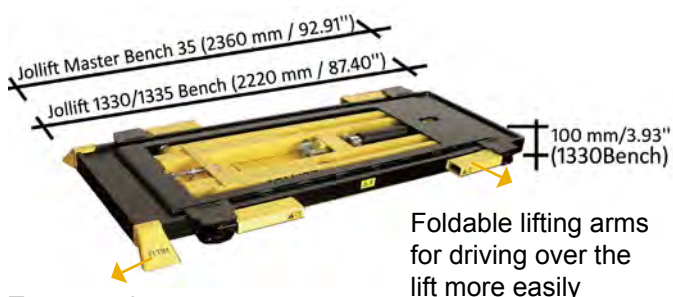


PH model
Pneumohydraulic
(only 1330 Bench Combi)




EH model Electrohydraulic
- 400 V 3phase (standard)
- 230 V 3phase or 1phase (on request)

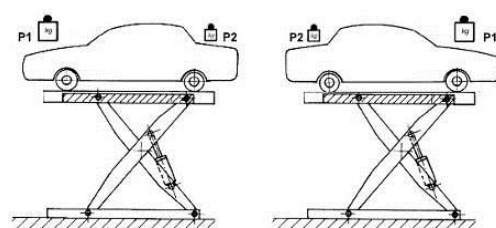

Reversible load, the heaviest side of the vehicle (motor side) on both sides of the bench

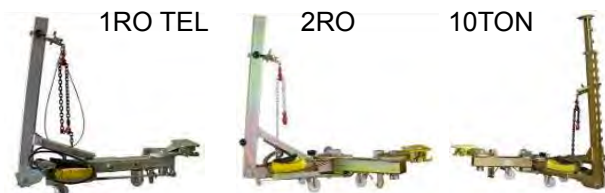

3 traction arm models available that can be mounted on any point of the lifting platform

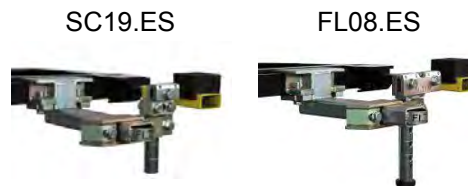

2 clamp models available that can be mounted comfortably when the vehicle has already been raised as they are independent from the lifting supports. FL08 clamps allow to raise the vehicle off the platform of the lift.

Safety devices



Mechanical safety catch




Emergency stop button with key against non-authorized use



Safety device operating during lowering with acoustic signal activation



The telescopic lifting supports are inside the footprint area of the vehicle that has been raised, for the safety of people working near the vehicle.



Outer and inner wheel stops on the wheel lifting supports

Main optional accessories



RC remote control



Wheel lifting supports with crossbars available as an option on all floor-mounted models. Driving over the lift becomes faster and the vehicle structure does not flex





B90 pads remain fastened to the lifting support



RUB high / adjustable pads



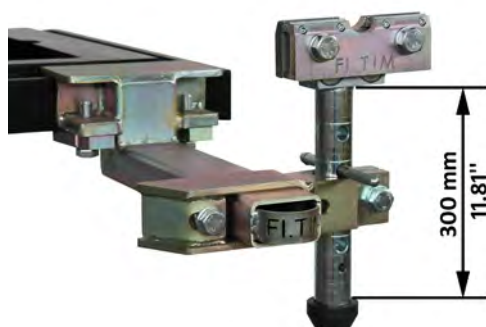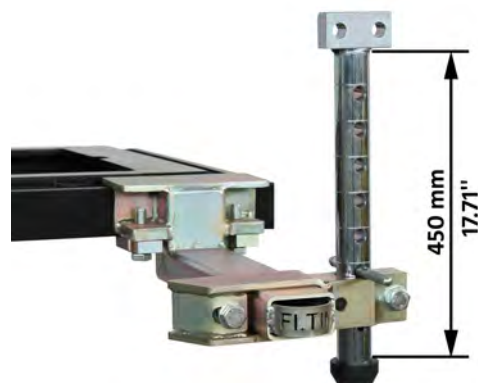

**FL08. ES****ST450 (optional accessory)**
For measuring systems**SC19. ES****WITH HIGH RUBBER BLOCK****WITH LOW RUBBER BLOCK**

Protection sheath for hydraulic hose


Safety cable

Protection cover for traction arm cylinder

BT 1ROTEL

Single horizontal rotation telescopic traction arm

Oil pressure gauge

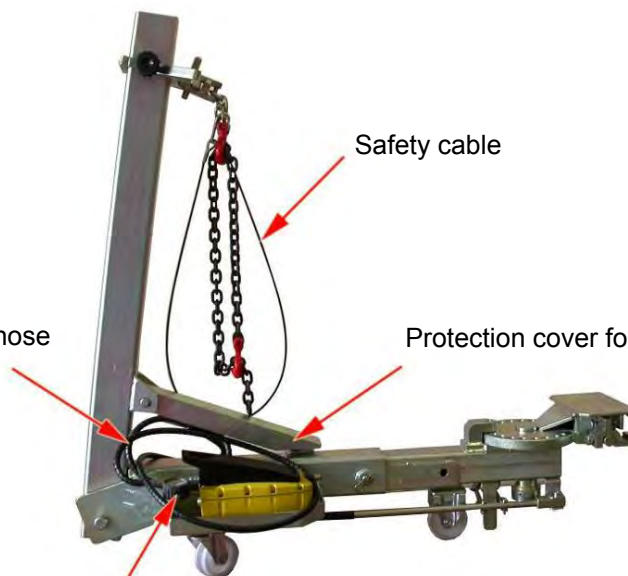

BT 2RO

Double horizontal rotation traction arm



BT 2RO COMPACT

Double horizontal rotation traction arm COMPACT



BT 2RO 10TON

Double horizontal rotation traction arm with 10t cylinder power



BT 2RO 10TON COMPACT

Double horizontal rotation traction arm with 10t cylinder power COMPACT






A106

Roller for downward pulling (optional accessory for BT1ROTEL traction arm)



A107

Vertical extension (optional accessory for BT1ROTEL – BT2RO – BT2ROCOM traction arms)

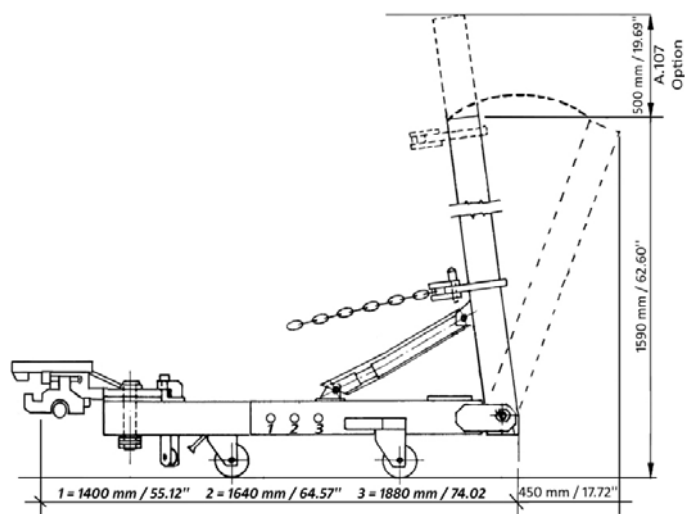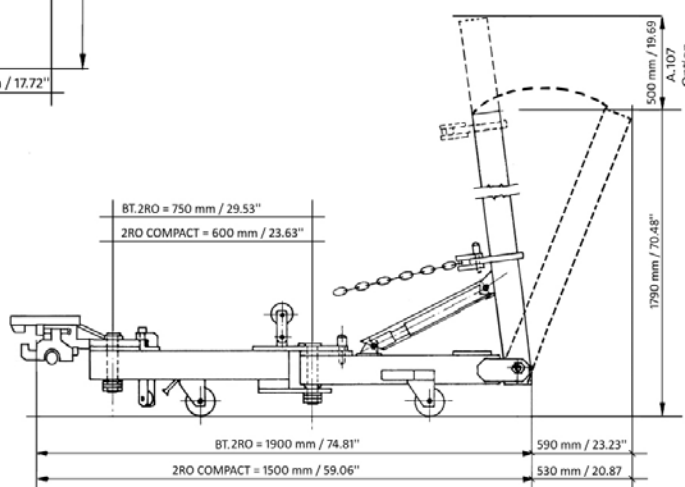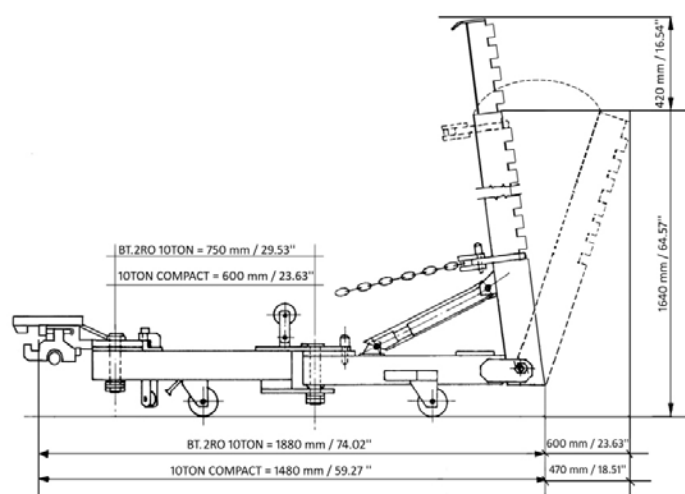**BT 1ROTEL****BT 2RO
BT 2RO COMPACT****BT 2RO 10TON
BT 2RO 10TON COMPACT**

JOLLIFF 1330 BENCH

3000 kg max capacity 6615 lb
 100 mm minimum height 3.94"
 1300 mm lifting height 51.18"
 (to the top of rubber pad)



Jollift 1330 Bench 1ROTEL SC06



"COMBI PH" version
Pneumohydraulic



"EH" version
Electrohydraulic



"RC" push button panel
(optional accessory)



BT1ROTEL



BT2RO






BT2RO10TON



SC19.ES



FL08.ES

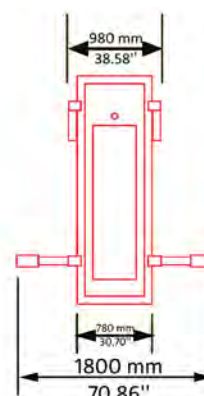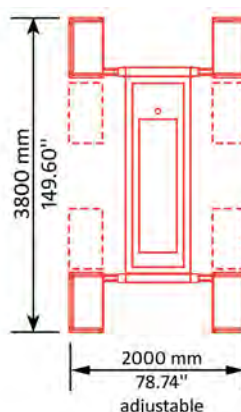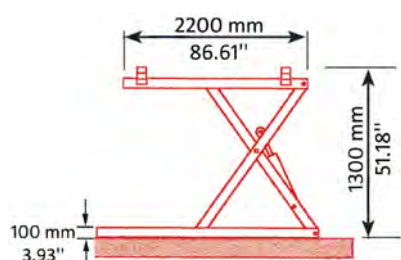

JOLLIFF 1335 BENCH

3500 kg max capacity 7717 lb
 105 mm minimum height 4.13"
 1300 mm lifting height 51.18"
 (to the top of rubber pad)



Jollift 1335 Bench 2RO FL08



"EH" version
 Electrohydraulic



"RC" push button panel
 (optional accessory)



BT1ROTEL



BT2RO






BT2RO10TON



SC19.ES



FL08.ES

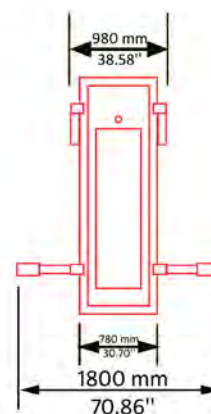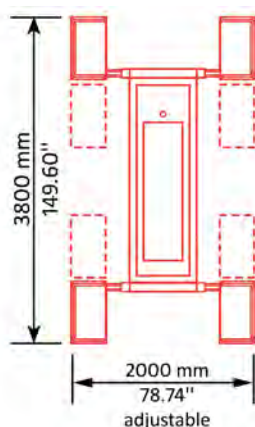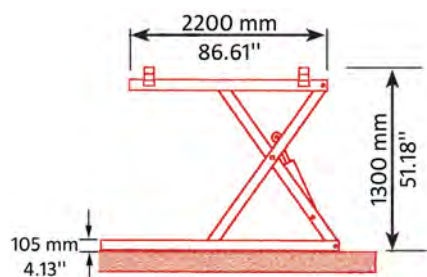

JOLLIFF MASTER BENCH 35

3500 kg max capacity 7717 lb
 105 mm minimum height 4.13"
 1640 mm lifting height 64.57"
 (to the top of rubber pad)



Jolliff Master Bench 35 10TONFL08



"EH" version
 Electrohydraulic



"RC" push button panel
 (optional accessory)



BT1ROTEL



BT2RO






BT2RO10TON



SC19.ES



FL08.ES

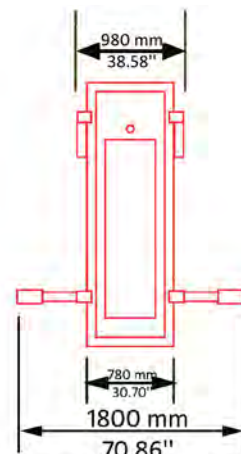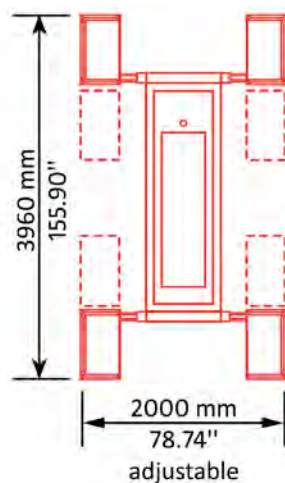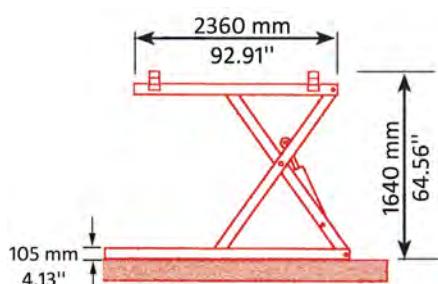

JOLLIFT LB

3200 kg maximum capacity 7056 lb

1480 mm lifting capacity 58.26

260 mm pit depth 10.23"

JOLLIFT FLEX 35

3500 kg maximum capacity 7717 lb

1640 mm lifting height 64.56"

300 mm pit depth 11.81"

JOLLIFT 4TON

3500 kg maximum capacity 7717 lb

1440 mm lifting height 56.69"

300 mm pit depth 11.81"

JOLLIFT 4TON 286



3500 kg maximum capacity 7717 lb

1440 mm lifting height 56.69"

300 mm pit depth 11.81"

Main features**Lifting by rubber blocks and wheels free or by wheel lifting supports**

EH model Electrohydraulic
 - 400 V 3phase (standard)
 - 230 V 3phase or 1phase (on request)

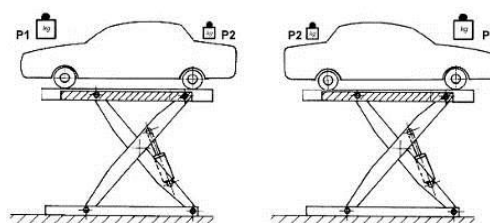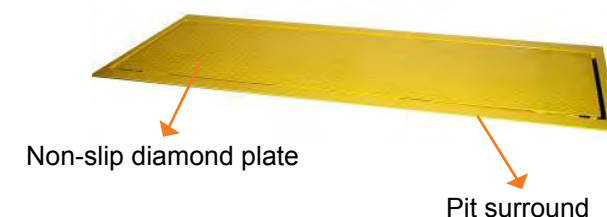

Reversible load, the heaviest side of
 the vehicle (motor side) on
 both sides of the lift



3 traction arm models available that can be
 mounted on any point of the lifting platform

SC19.IN

FL08.IN




2 clamp models available that can be mounted
 comfortably when the vehicle has already been
 raised as they are independent from the lifting
 supports. FL08 clamps allow to raise the vehicle
 off the platform of the lift.

Safety devices



Mechanical safety catch

Emergency stop button with key
against non-authorized useSafety device operating
during lowering with acoustic signal
activation (on JO.30JP and JO.35)The telescopic lifting supports are inside
the footprint area of the vehicle that has
been raised, for the safety of people
working near the vehicle.Outer and inner wheel stops on
the wheel lifting supportsSafety device operating during
lowering with acoustic signal activation


Main optional accessories



AUT automatic device for opening and closing
the lifting supportsWheel lifting supports with crossbars available
as an option on all floor-recessed models.
Driving over the lift becomes faster and the
vehicle structure does not flex

RUB high / adjustable pads



RC - remote control

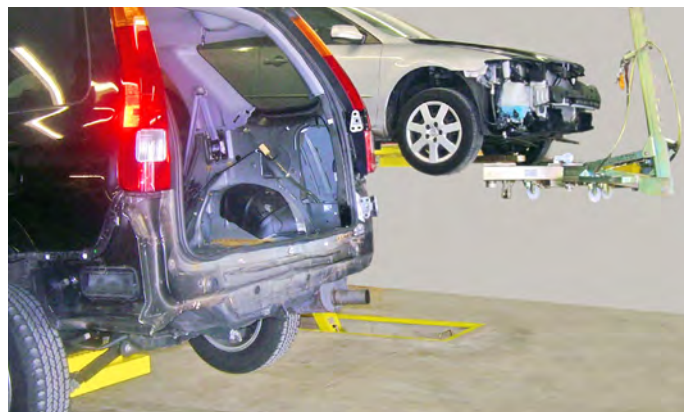

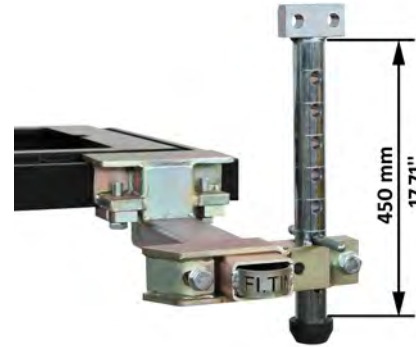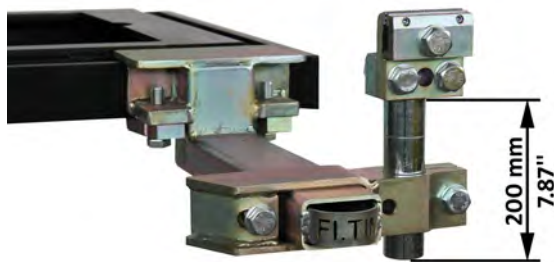**FL08.IN****ST450 (optional accessory)**
For measuring systems**SC19.IN****WITH HIGH RUBBER BLOCK****WITH LOW RUBBER BLOCK**

Protection sheath for hydraulic hose


Safety cable

Protection cover for traction arm cylinder

BT 1ROTEL

Single horizontal rotation telescopic traction arm

Oil pressure gauge

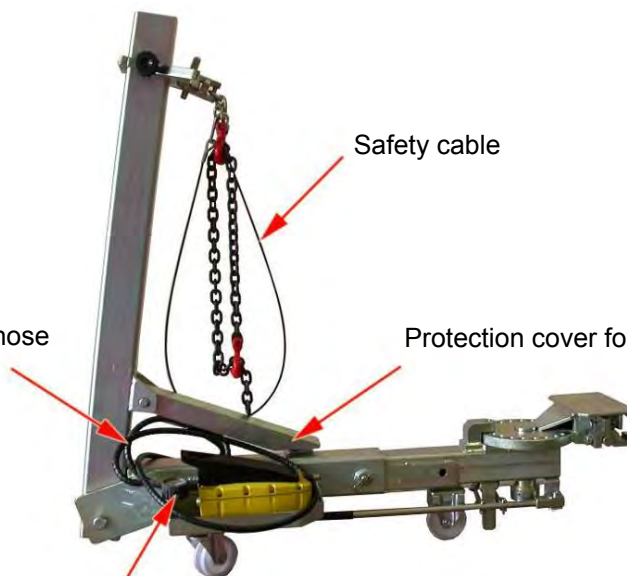

BT 2RO

Double horizontal rotation traction arm



BT 2RO COMPACT

Double horizontal rotation traction arm COMPACT



BT 2RO 10TON

Double horizontal rotation traction arm with 10t cylinder power



BT 2RO 10TON COMPACT

Double horizontal rotation traction arm with 10t cylinder power COMPACT






A106

Roller for downward pulling (optional accessory for BT1ROTEL traction arm)



A107

Vertical extension (optional accessory for BT1ROTEL – BT2RO – BT2ROCOM traction arms)

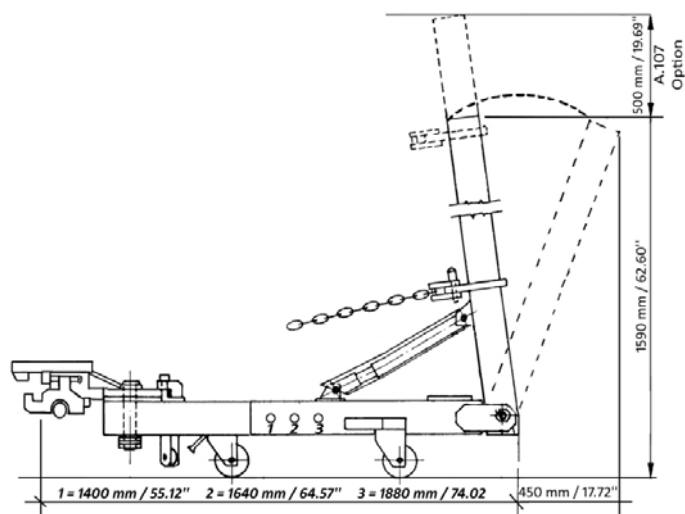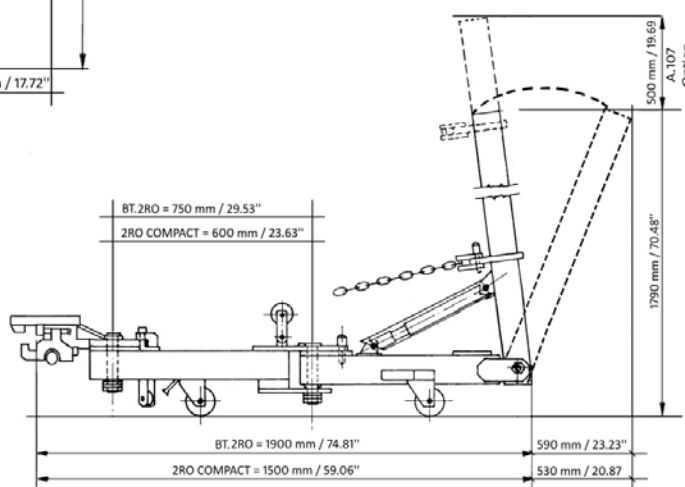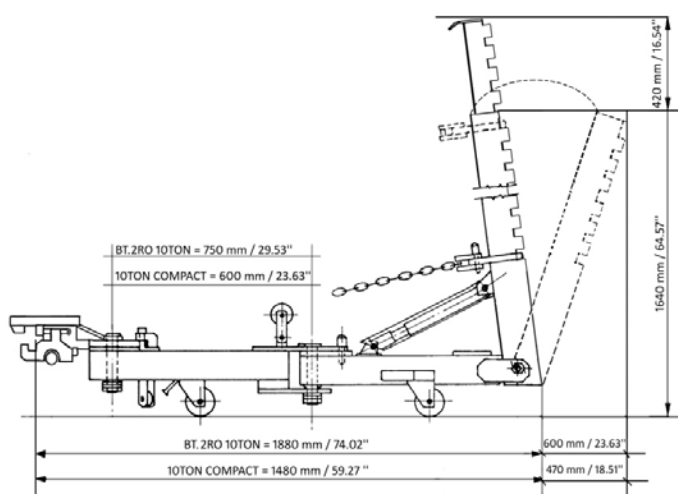**BT 1ROTEL****BT 2RO**
BT 2RO COMPACT**BT 2RO 10TON**
BT 2RO 10TON COMPACT

JOLLIFF LB

3200 kg max capacity 7056 lb

0 mm minimum height 0"

1480 mm lifting height 58.26"
(to the top of rubber pad)



Jolliff LB 1ROTEL SC19



EH
Electrohydraulic



RC push button panel
(optional accessory)



BT1ROTEL



BT2RO



BT2RO10TON



SC19.IN






FL08.IN

Minimum pit dimensions:

Length = 2250 mm / 88.58"

Width = 720 mm / 28.34 "

Depth = 260 mm / 10.23"

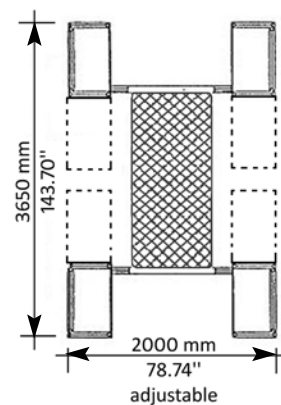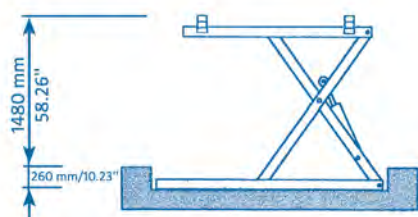


JOLIFT FLEX 35

3500 kg max capacity 7717 lb

0 mm lifting height 0"

1640 mm lifting height 64.56"
(to the top of rubber pad)

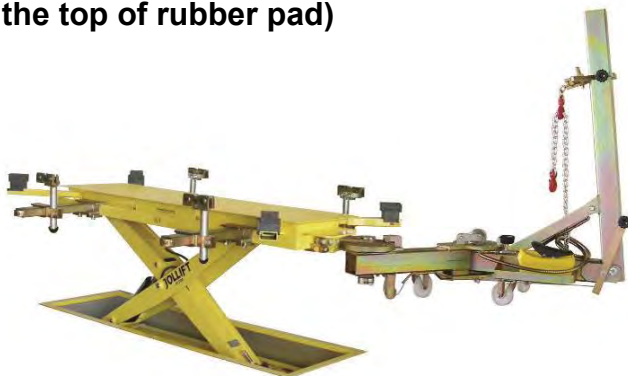

Jollift FLEX 35 2RO FL08



EH
Electrohydraulic



"RC" push button panel
(optional accessory)



BT1ROTEL



BT2RO



BT2RO10TON



SC19.IN






FL08.IN

Minimum pit dimensions:

Length = 2400 mm / 94.48"

Width = 800 mm / 31.49"

Depth = 300 mm / 11.81"

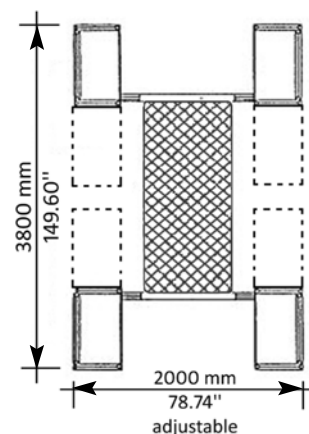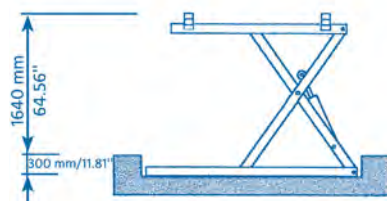

FI.TIM
LIFTS & BENCHES - COLLISION REPAIR


JOLLIIFT 4TON

3500 kg max capacity 7717 lb

0 mm lifting height 0"

1440 mm lifting height 56.69"

(to the top of rubber pad)

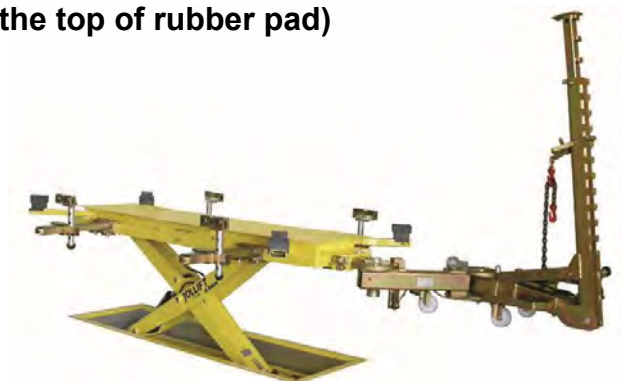

Jolliift 4TON 10TON FL08



EH
Electrohydraulic



"RC" push button panel
(optional accessory)



BT2RO



BT2RO10TON






FL08.IN

Minimum pit dimensions:

Length = 2400 mm / 94.48"

Width = 800 mm / 31.49"

Depth = 300 mm / 11.81"

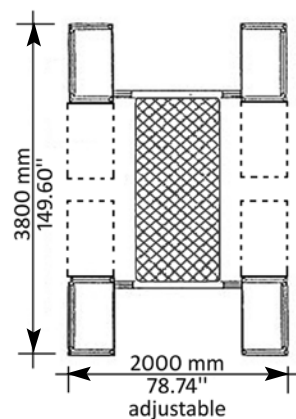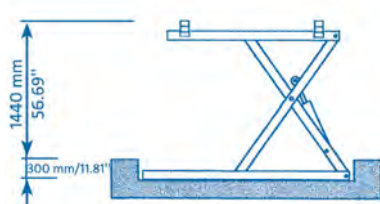


■ JOLLIFT 4TON 286

3500 kg max capacity 7717 lb

0 mm minimum height 0"

1440 mm lifting height 56.69"
(to the top of rubber pad)

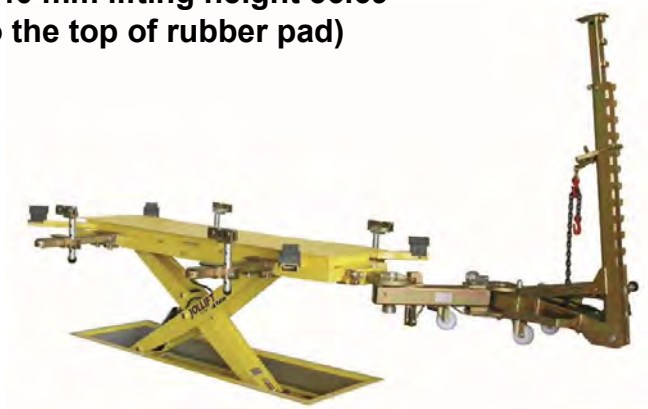

Jollift 4TON286 10TON FL08



EH
Electrohydraulic



"RC" push button panel
(optional accessory)



BT2RO



BT2RO10TON






FL08.IN

Minimum pit dimensions:

Length = 2900 mm / 114.17"

Width = 800 mm / 31.49"

Depth = 300 mm / 11.81"

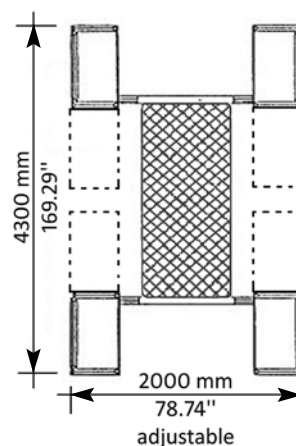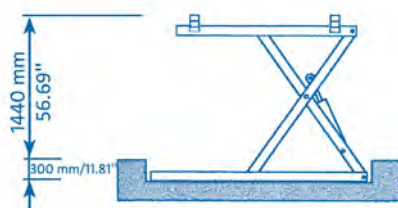

BENCH FOR CARS – VANS - PICKUPS - SUVs – COMMERCIAL VEHICLES - MOTORHOMES

MASTER 5000.ES FLOOR-MOUNTED

5000 kg max capacity 11.000 lb

120 mm minimum height 4.72" (to the upper platform)
1380 mm lifting height 54.33" (to the lifting support on which the wheel sits)

MASTER 5000.IN FLOOR-RECESSED

5000 kg max capacity 11.000 lb

0 mm minimum height 0" (to the upper platform)
1380 mm lifting height 54.33" (to the lifting support on which the wheel sits)

Main features


Same supports for raising by the wheels and by the rocker panel with rubber pads



Standard lifting by wheel lifting supports



EH = electrohydraulic control unit with remote control

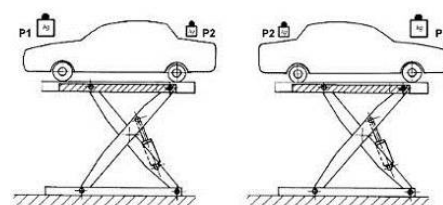

Reversible load, the heaviest side of the vehicle (motor side) on both sides of the bench

Safety devices



Mechanical safety catch



Emergency stop button with key against non-authorized use



Outer and inner wheel stops on the wheel lifting supports



Safety device operating during lowering with acoustic signal activation



Main optional accessories



Adjustable low rubber pads for cars



Adjustable high rubber pads for commercial vehicles

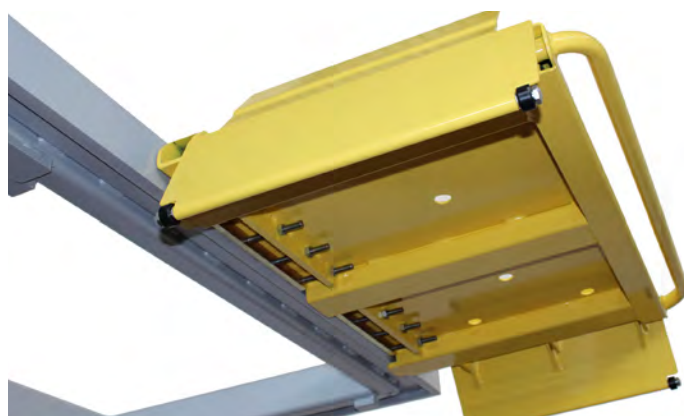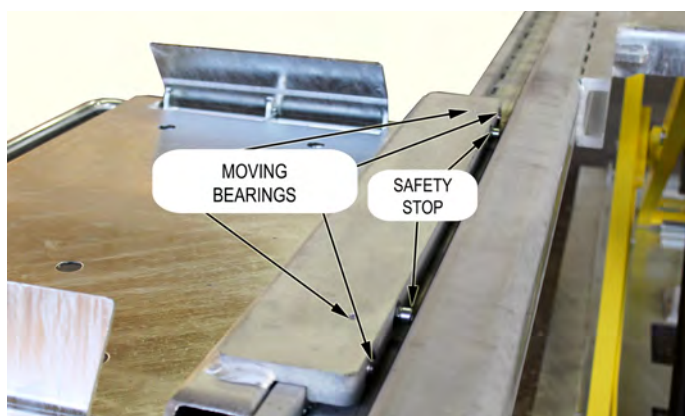

Bearings for moving the wheel lifting supports easily

The incline / alignment of the wheel lifting supports can be adjusted



LOAD TEST ON WHEELS
+ 50% OVERLOAD
EN 1493 EUROPEAN STANDARD

2 PORTIONS ON ONE SIDE
1 PORTION ON THE OPPOSITE SIDE




LOAD TEST ON RUBBER BLOCKS AND
+ 50% OVERLOAD
EN 1493 EUROPEAN STANDARD

3 PORTIONS ON ONE SIDE
1 PORTION ON THE OPPOSITE SIDE


New registered patent

**MASTER 5000.IN
FLOOR RECESSED**




- 0 mm minimum height 0" (to the upper platform)
- 50 mm minimum height 1.96" (to the lifting support on which the wheels sits)
- 1330 mm lifting height 52.36" (to the upper platform)
- 1380 mm lifting height 54.33" (to the lifting support on which the wheels sits)

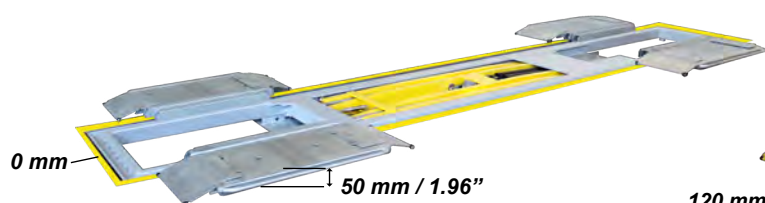**MASTER 5000.ES
FLOOR MOUNTED**




- 120 mm minimum height 4.72" (to the upper platform)
- 50 mm minimum height 1.96" (to the lifting support on which the wheels sits)
- 1450 mm lifting height 57.08 " (to the upper platform)
- 1380 mm lifting height 54.33" (to the lifting support on which the wheels sits)

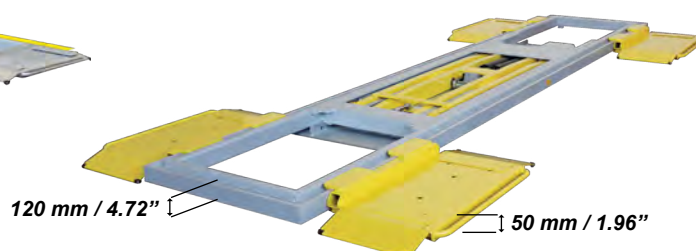**Minimum pit dimensions:**


Length: = 5060 mm / 199.21'
Width: = 1130 mm / 44.48'
Depth: = 130 mm / 5.11"

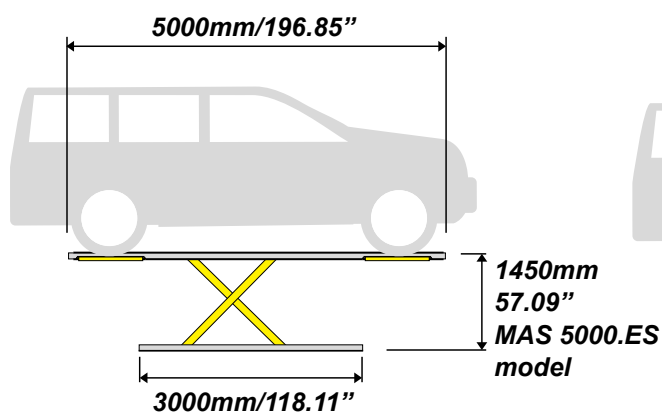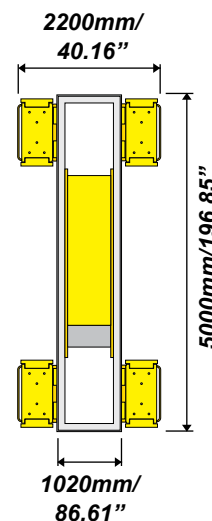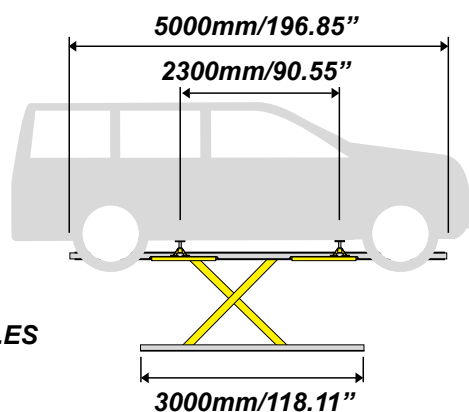**5000 KG / 11.000 LB
CAPACITY****BY THE WHEELS****BY THE RUBBER PADS**

Accessories for the bench:

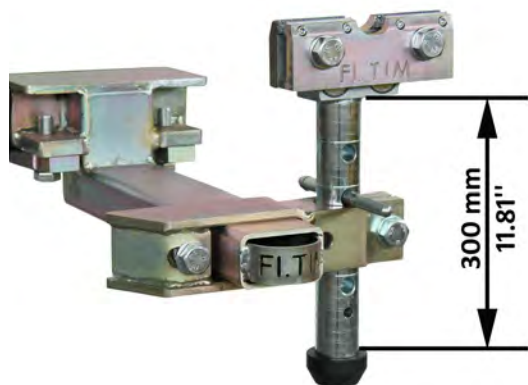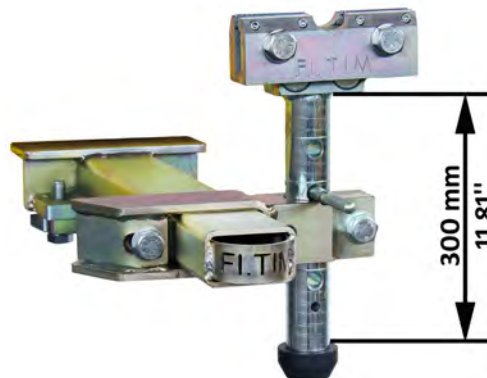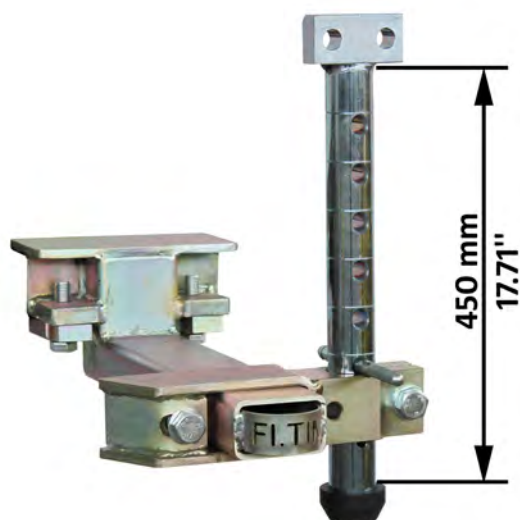**FL08. ES****FL08. IN**

ST450 (Optional accessory for FL08)
For measuring systems

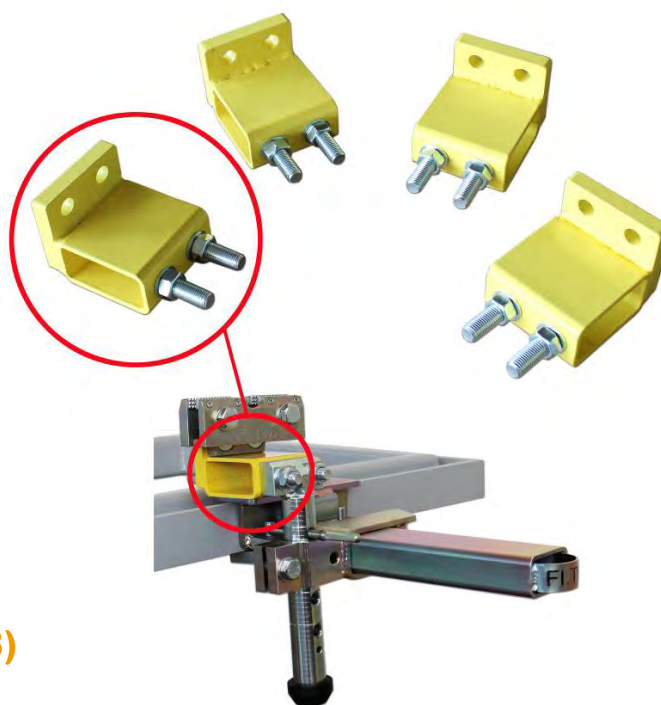

DIS.FL08MAS5000 (optional accessory)
Clamp spacers

Protection sheath for hydraulic hose


Safety cable

Protection cover for traction arm cylinder

BT 1ROTEL

Single horizontal rotation telescopic traction arm

Oil pressure gauge

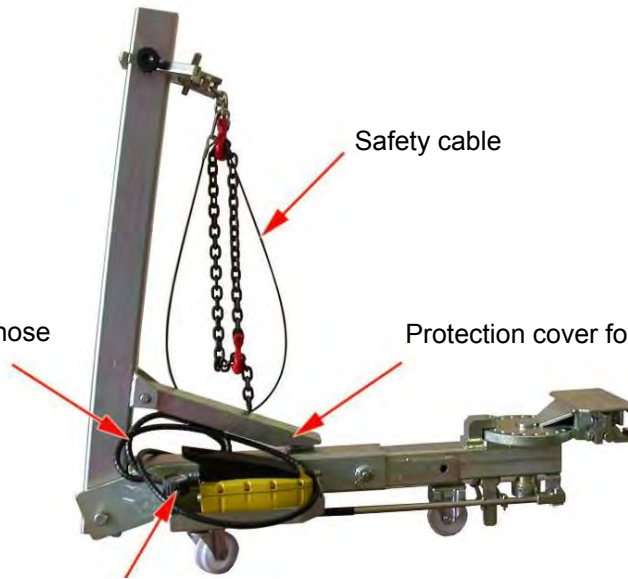

BT 2RO

Double horizontal rotation traction arm



BT 2RO COMPACT

Double horizontal rotation traction arm COMPACT



BT 2RO 10TON

Double horizontal rotation traction arm with 10t cylinder power



BT 2RO 10TON COMPACT

Double horizontal rotation traction arm with 10t cylinder power COMPACT






A106

Roller for downward pulling (optional accessory for BT1ROTEL traction arm)



A107

Vertical extension (optional accessory for BT1ROTEL – BT2RO – BT2ROCOM traction arms)

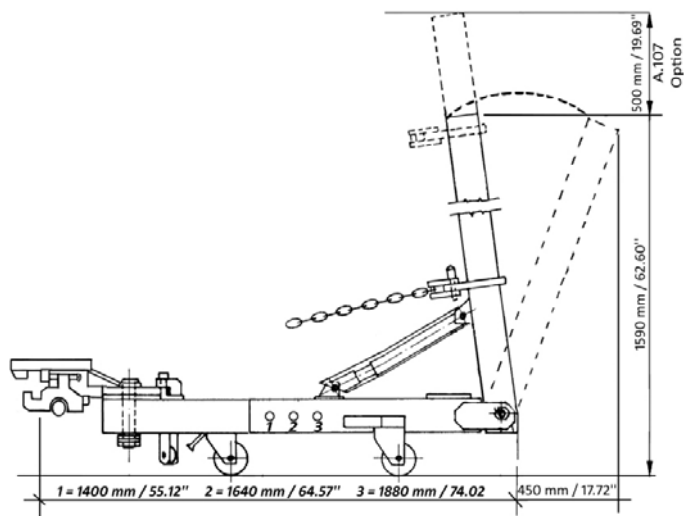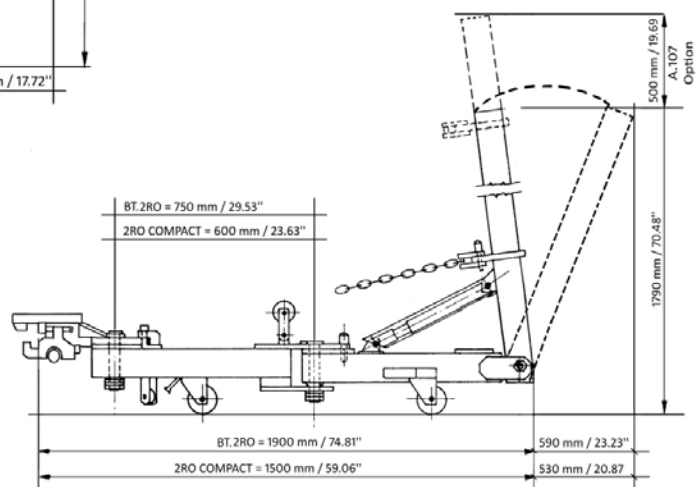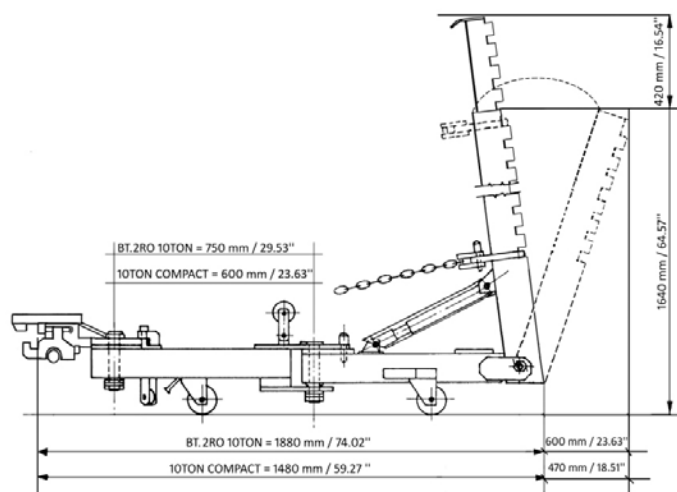**BT 1ROTEL****BT 2RO**
BT 2RO COMPACT**BT 2RO 10TON**
BT 2RO 10TON COMPACT

450° hot-dip galvanizing, available on request for the bases of all FI.TIM lifts and benches.

Complete galvanizing of base, upper platform and wheel lifting supports available on request for many models.

JOLLIFT 1330 BENCH

JOLLIFT 1335 BENCH

JOLLIFT MASTER BENCH 35



JOLLIFT FLEX 35

JOLLIFT 4TON 286



MASTER 5000 ES floor-mounted

MASTER 5000 IN floor-recessed



Wide range of fixtures usable on all FI.TIM benches



JOLLIFAST

Anchoring system for holding all types of cars – SUVs – 4x4s – Commercial vehicles



KITFIX

Anchoring system for locking BMW, Mercedes and many types of cars – SUVs – 4x4s – Commercial vehicles



MULTIFIX

Three-dimensional supports for FASTENING – PULLING – THRUSTING, suitable for light / medium vehicle repairs



MULTISET

Three-dimensional supports for: FASTENING – PULLING – THRUSTING, suitable for medium / heavy duty vehicle repairs



LA 4X4 CHASSIS


Truck clamps



RENAULT / NISSAN

Clamps for Renault / Nissan

Jollifast

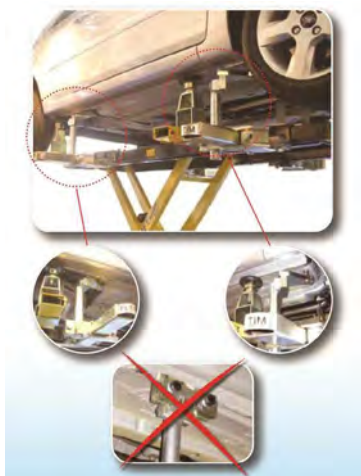

Anchoring system which takes advantage of the body and chassis holes
Usable in conjunction with JOLLIFT benches fitted with independent lifting supports with rubber blocks or wheel lifting supports



Usable on all FI.TIM benches equipped with SC06 – SC19 or FL08 clamps



Jollifast is a fast anchoring system which takes advantage of the lower holes and projecting screw heads in the car.

Considerable time saving on small and medium repairs without compromising the original look of the pinchwelds.

Outside diameter for holes + inside diameter for projecting pivots 11/6 to 25/20.
Odd numbers = outside Ø
Even numbers = inside Ø
2 pieces per size

For holes Ø 19 to 25 numbers
Length 30mm
2 pieces per size

Inside Ø22
For projecting pivots and screws.
Length 60mm
2 pieces

Inside Ø26.
For projecting pivots and screws. Length 60 mm
2 pieces



For holes Ø8 to 30
Even numbers
Length 60mm
2 pieces per size

Inside Ø24
For projecting pivots and screws
Length 60 mm
2 pieces

Inside Ø28
For projecting pivots and screws
Length 60 mm
2 pieces

KITFIX



Anchoring system which takes advantage of the holes in the reinforced structural part of the chassis



Benefits of KITFIX: fast anchoring with no need of removing / setting on the shields and no damage / restoration of the pinchwelds.



KX



KITFIX/1



KITFIX EX

KITFIX BMW



KITFIX MERCEDES



KITFIX




The innovative proposal from FITIM to fasten cars during repairs. KITFIX is preferably used with KX supports but it is compatible with Jollifast and Multifix09 and Multiset09 as well.



KITFIX is anchored to the strong round and oblong holes of large diameter that cars, SUVs and 4x4s have in their underside. Like Mercedes and BMW cars that have always been anchored in this way, most of cars, SUVs, 4x4s and commercial vehicles on the market can be fastened like that.



KITFIX / EX includes a panel with 4 packages of 4 fixtures.



KITFIX/ 1 includes 1 package of 4 fixtures for round or oblong holes so that each customer may purchase single packages for the cars they mostly repair.

Diameter of round holes or oblong holes dimension shown on each bush with fastening pivot as well as on the panel.

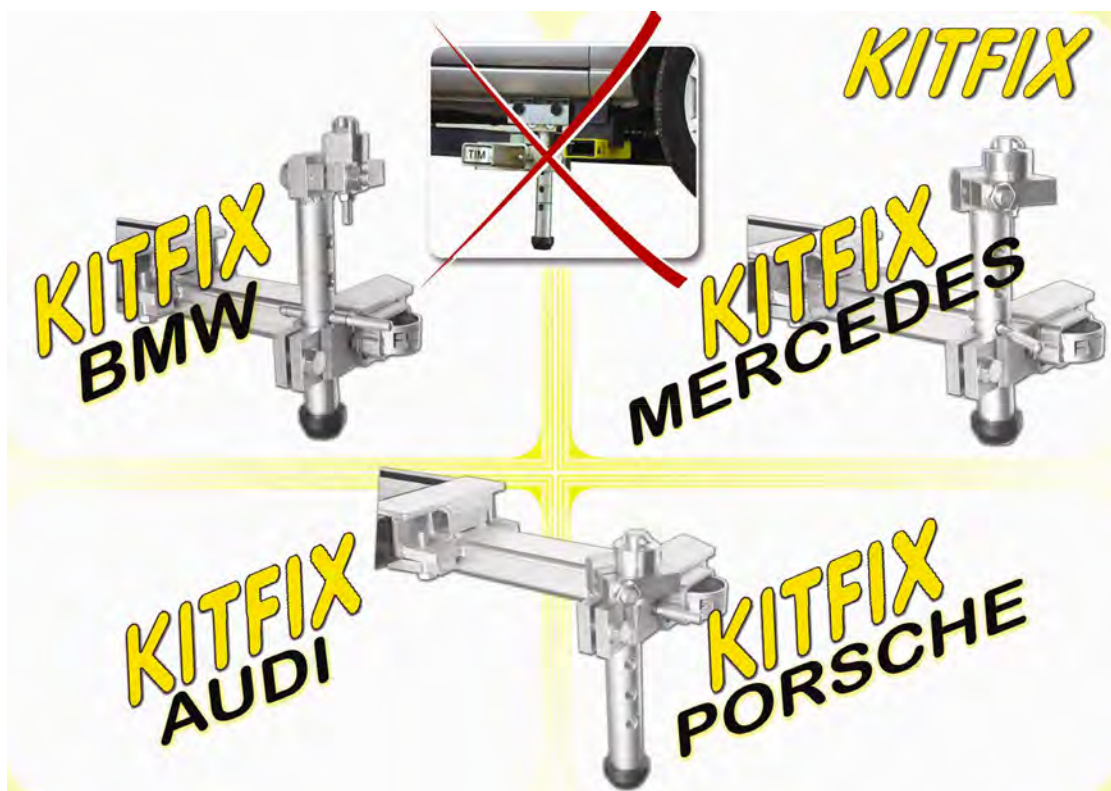

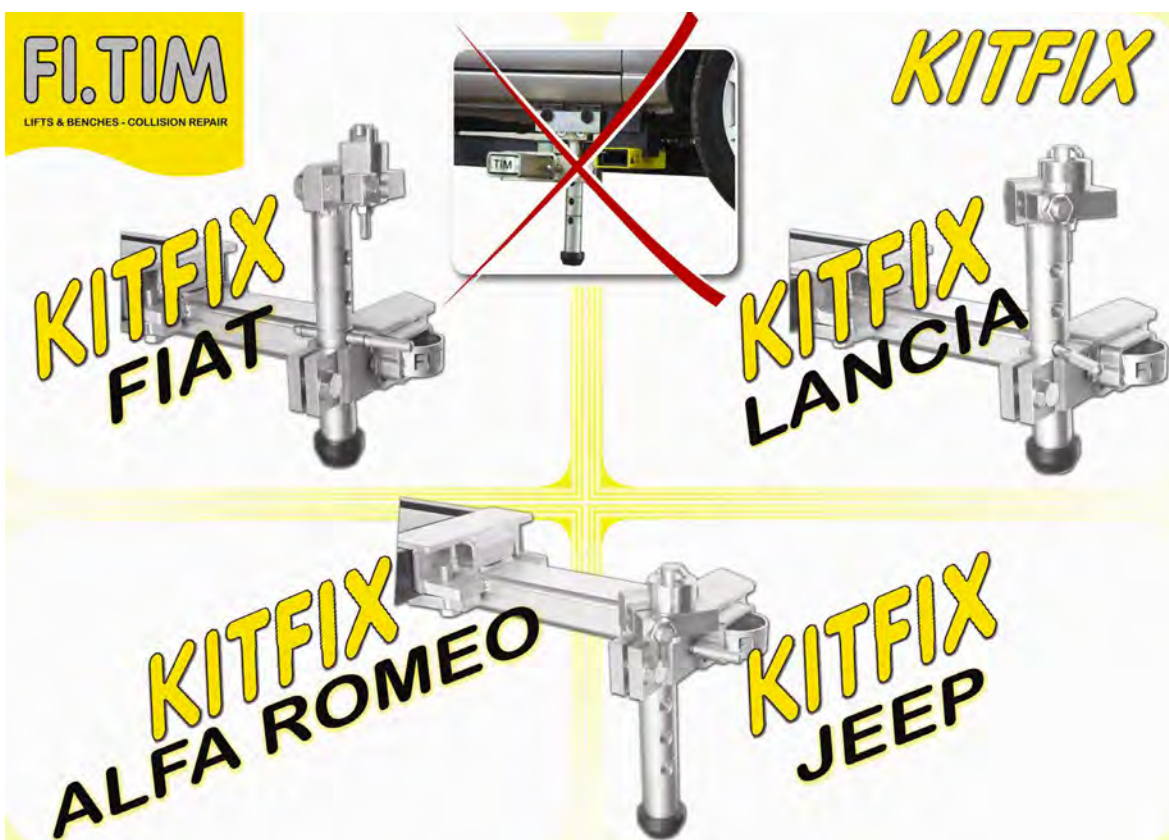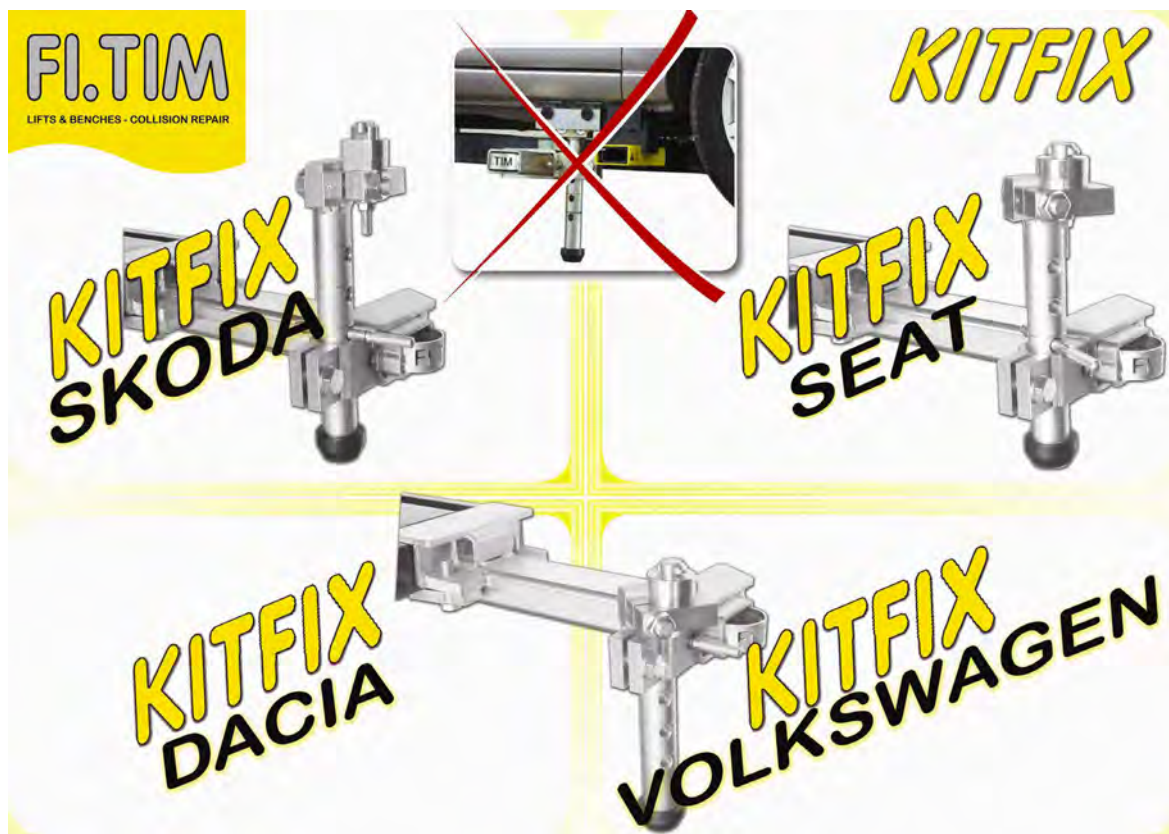


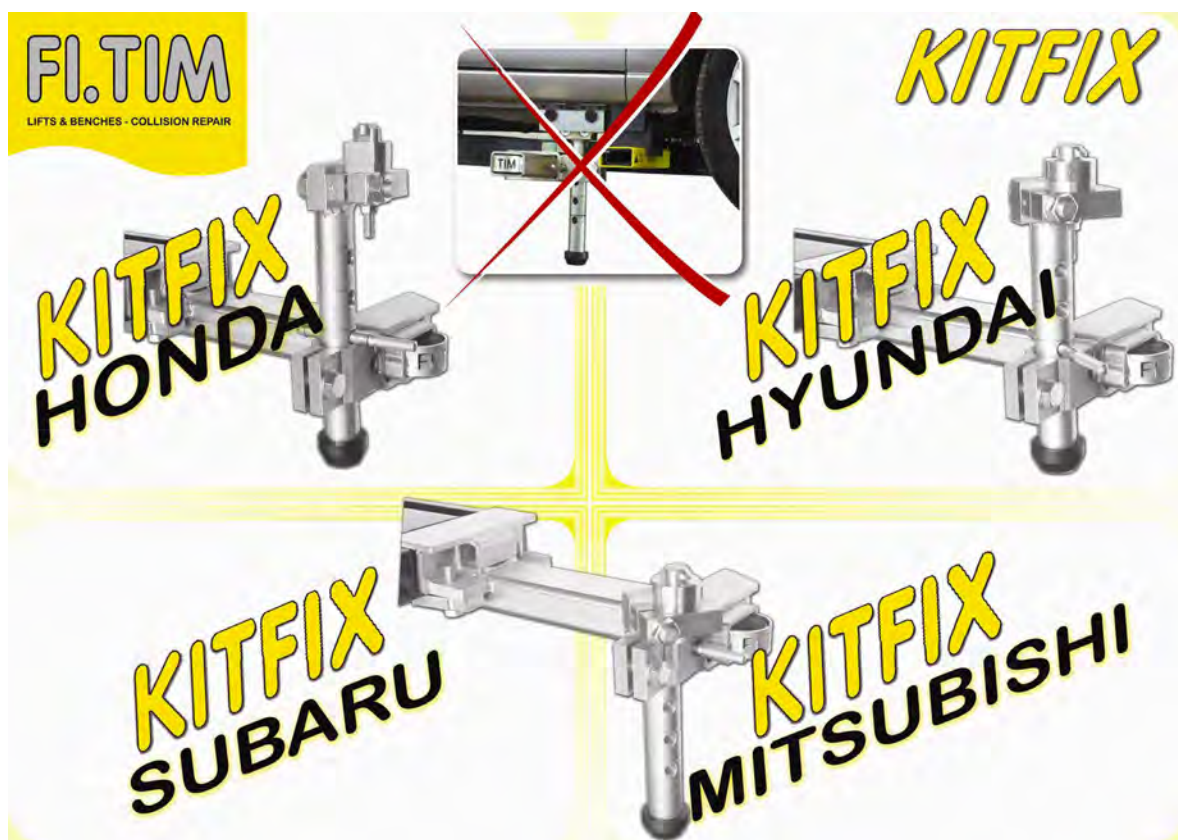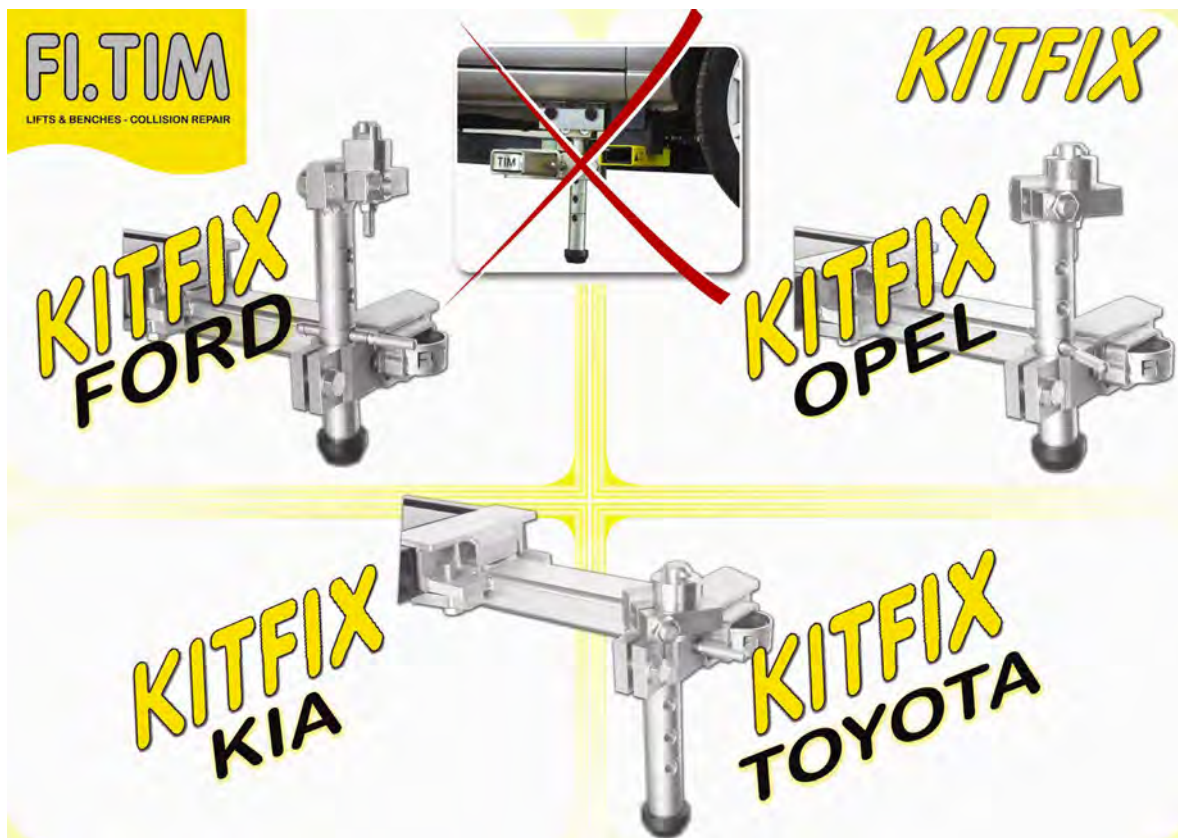

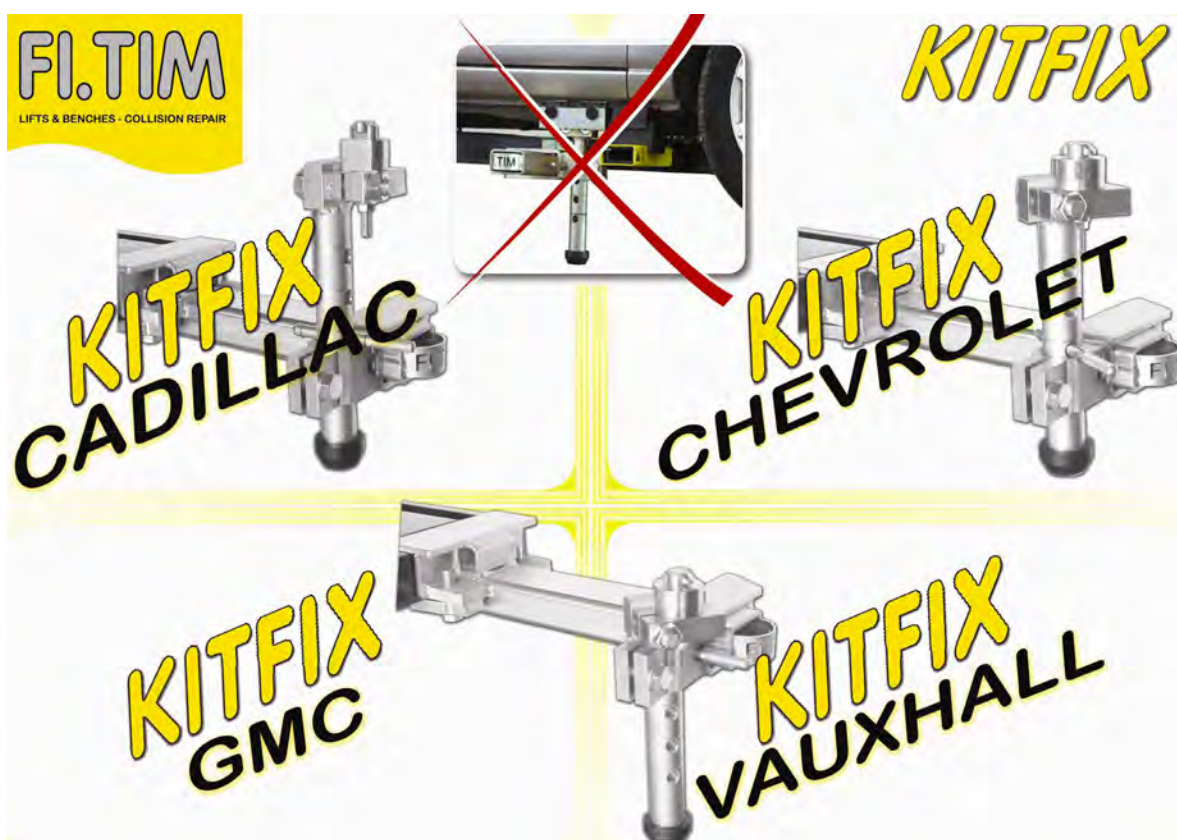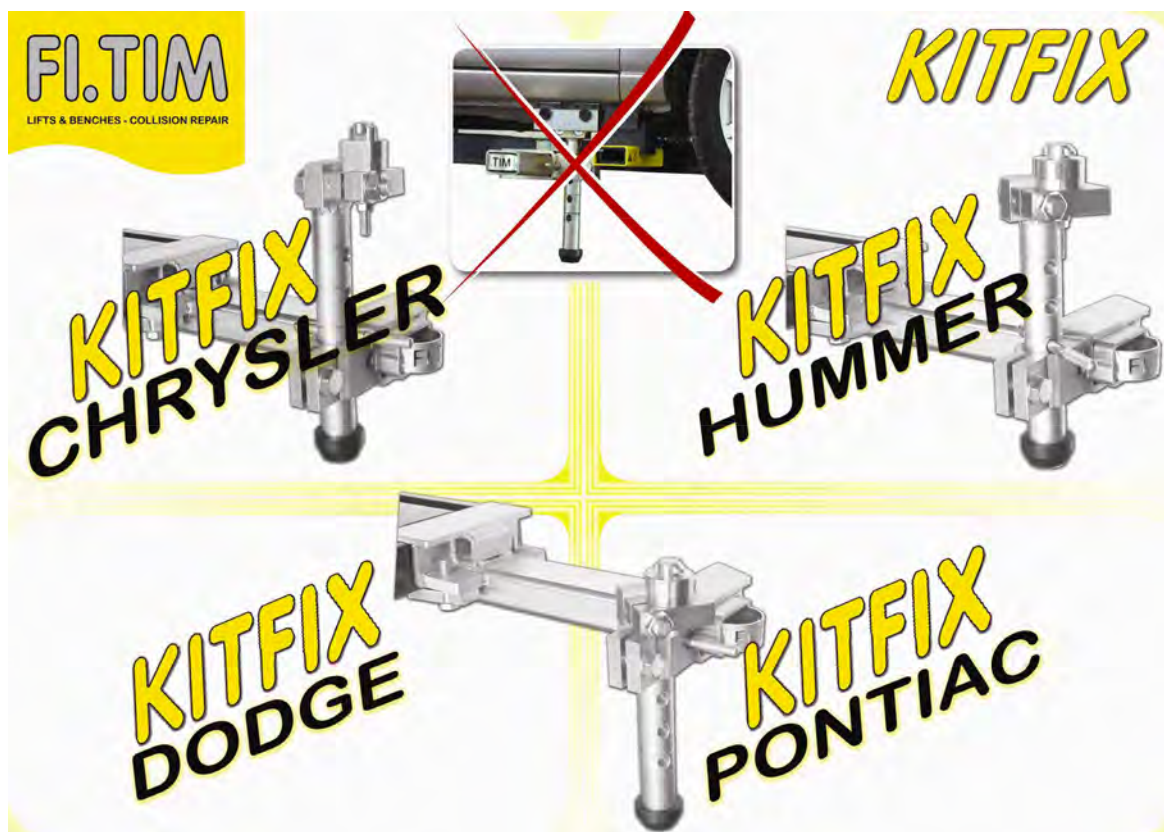

Multifix

Three-dimensional supports for: Fastening – Pulling – Thrusting

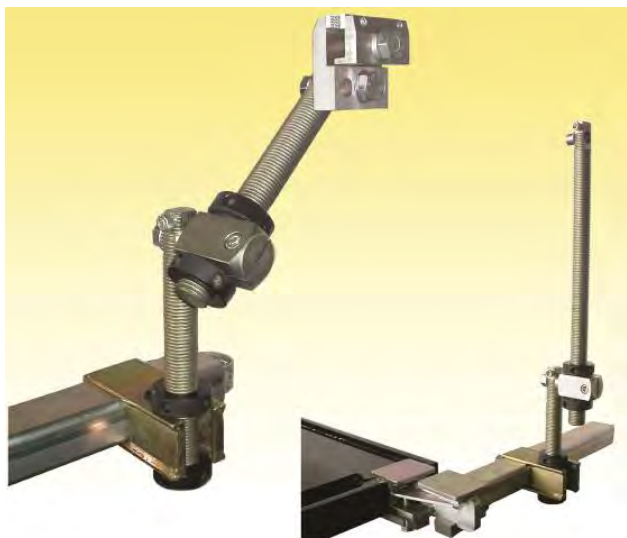


For light / medium vehicles




Quick fastening by means of a pull-clamp (FI.TIM patent)

Outfit

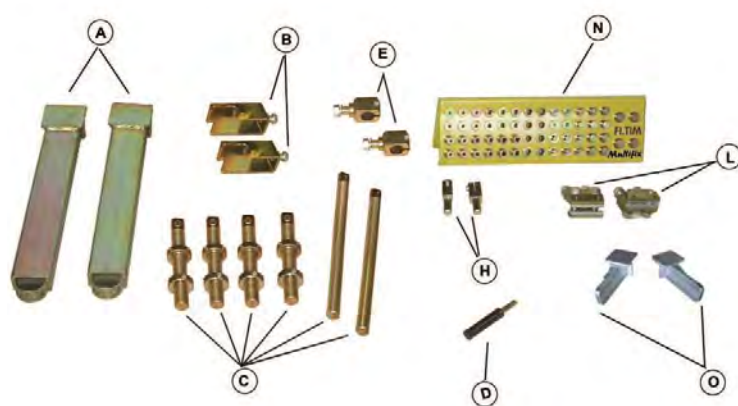


- A- Mounting arms to the lift - 2 pcs
- B- Brackets for arm/tube fastening - 2 pcs
- C- Threaded tubes - 2X660 mm long pieces - 4X
330mm long pieces with ring nut for fastening
- D- Wrench for tube adjusting - 1 piece
- E- Support for tube fastening - 2 pcs
- H- Articulated support for vehicle fastening - 2 pcs
- L- Clamps - 2 pcs
- N- Panel with 56 bushes of different diameter and size - 1 piece
- O- Supports for "A" arms fastening

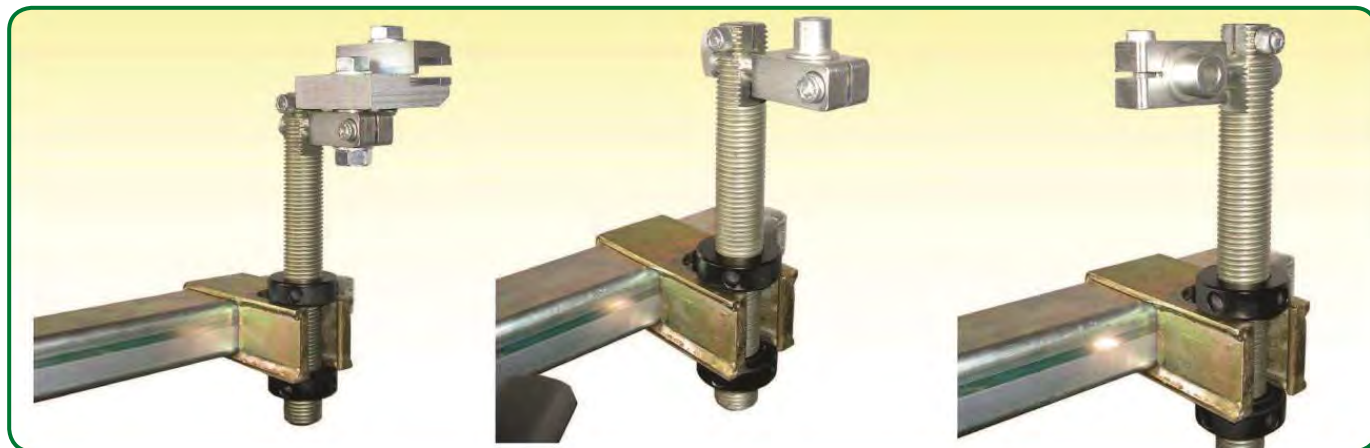
Multifix

Multiset

Three-dimensional supports for: Fastening – Pulling – Thrusting

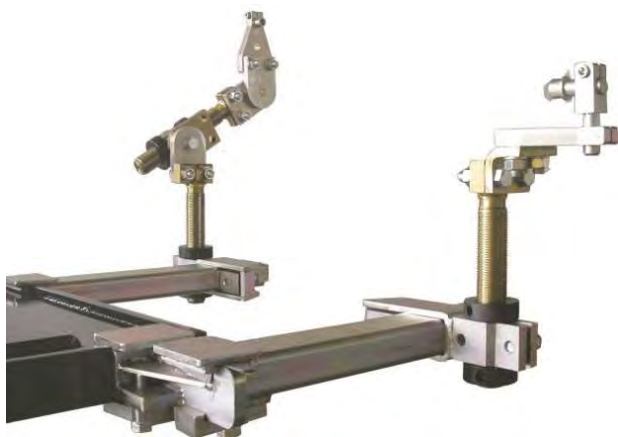


For 4x4 / medium / heavy duty vehicles

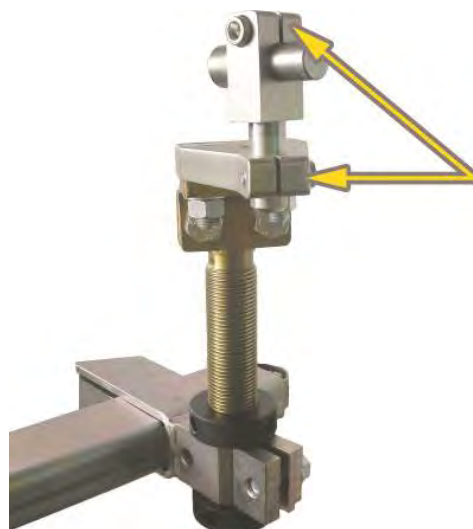

Quick fastening by means of a pullclamp



Outfit

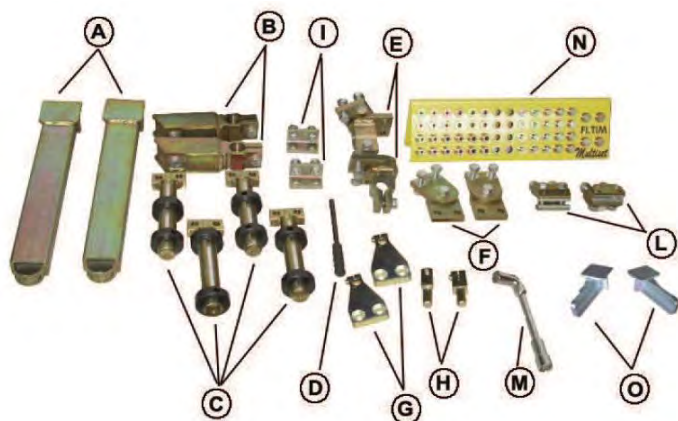

- A- Mounting arms to the lift - 2 pcs
- B- Brackets for arm/tube fastening - 2 pcs
- C- Threaded tubes with scale - 4 pcs
- D- Wrench for tube adjustment - 1 piece
- E- Articulated plates + support for tube fastening - 2 pcs
- F- Articulated plate - 2 pcs
- G- Vehicle fastening parts - 2 pcs
- H- Articulated support for vehicle fastening - 2 pcs
- L- Clamps - 2 pcs
- M- Wrench - 1 piece
- N- Panel with 56 bushes of different diameter and size - 1 piece
- O- Supports for "A" arms fastening



Multiset

Plates rotation with locking system

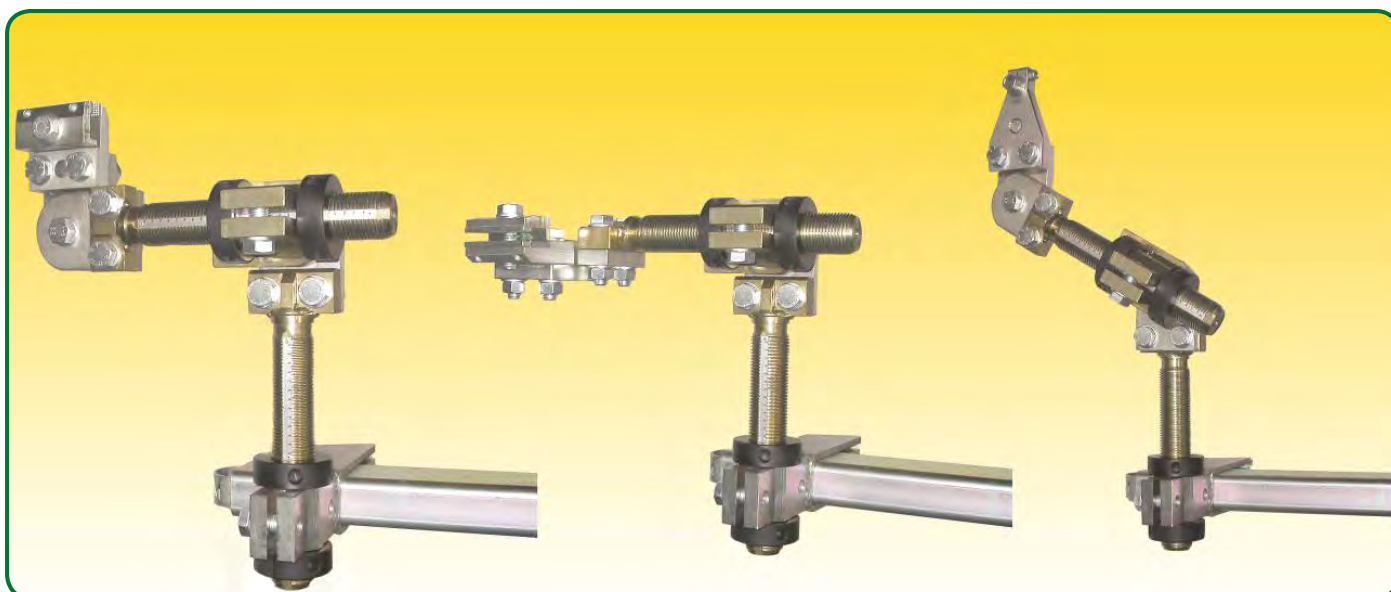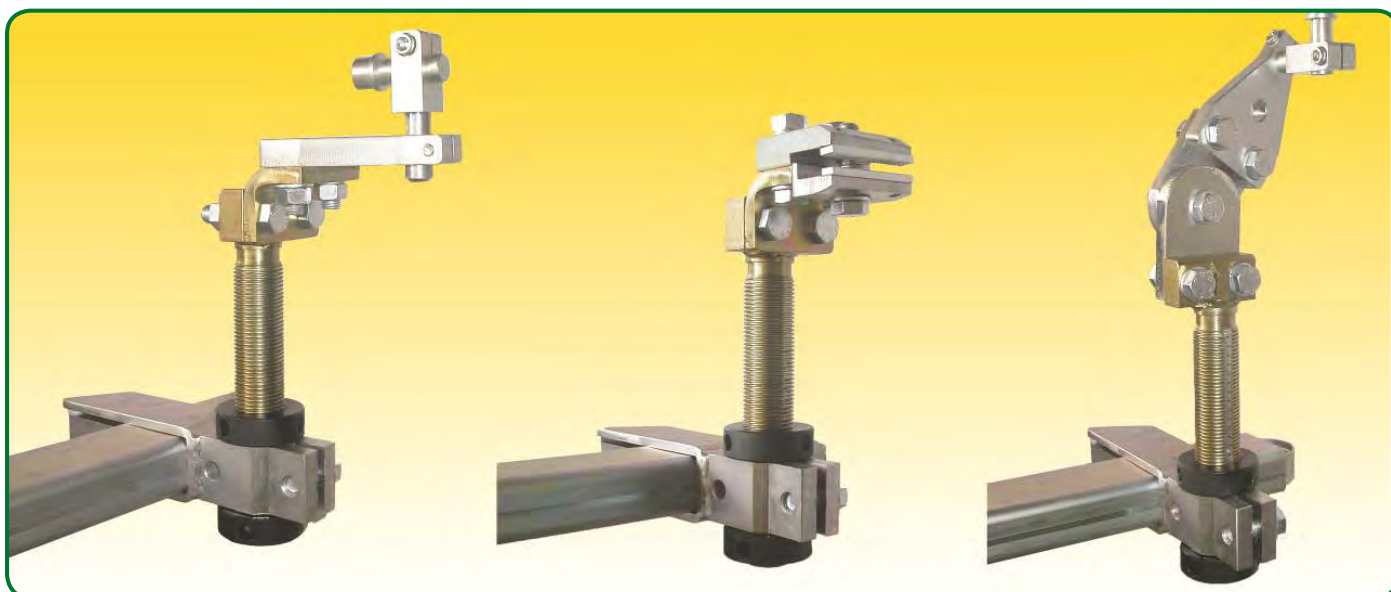


LA 4X4 CHASSIS

Truck clamps

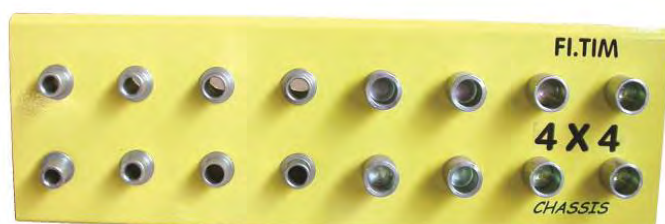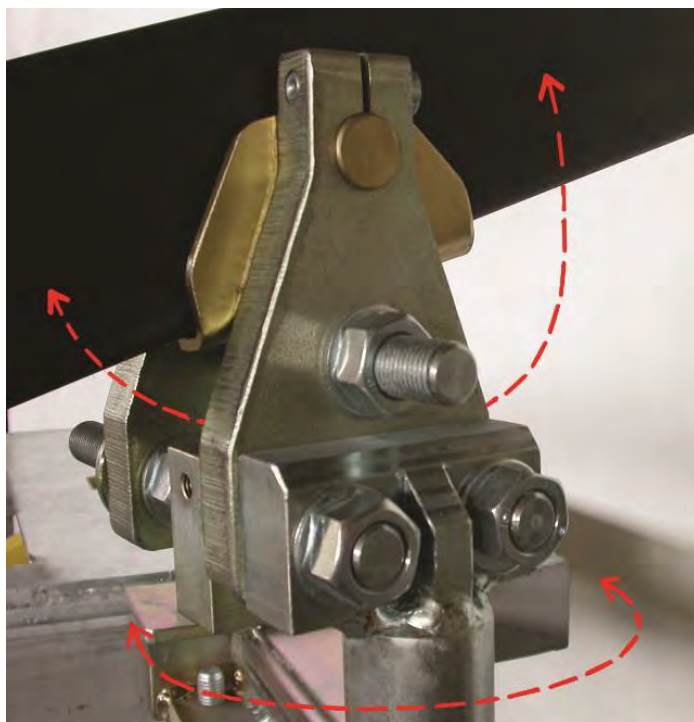

Renault / Nissan clamps

RENAULT NISSAN

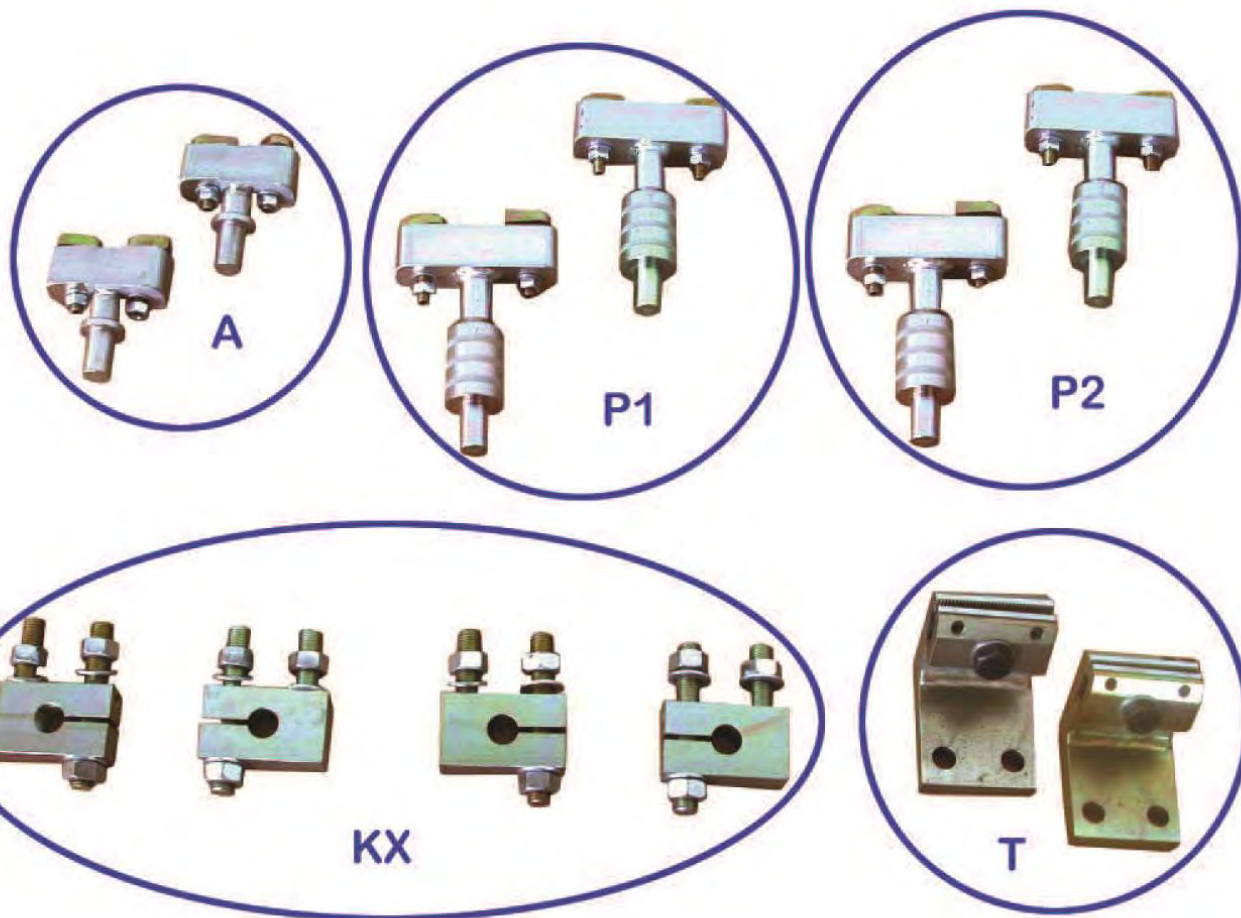

KX = supports (4 pcs.) supplied separately

A = Front – all models (2 pcs.)


P1 = Back - Megane II and Megane III (3 pcs.)

P2 = Back - Scenic (distance between holes different from the Megane) 2 pcs


T = Back - Renault Modus / Clio / Nissan Micra (2 pcs.)

LA 104

Multipurpose trolley

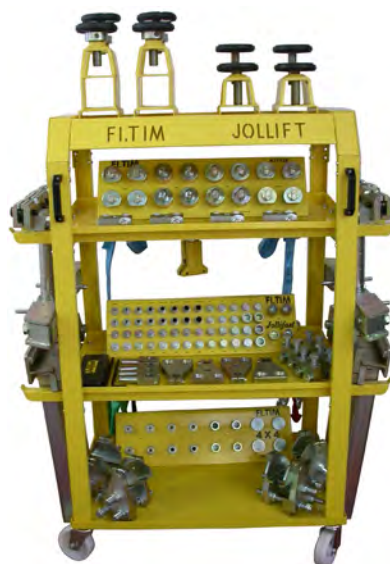

Very sturdy, for carrying and containing heavy clamps and accessories

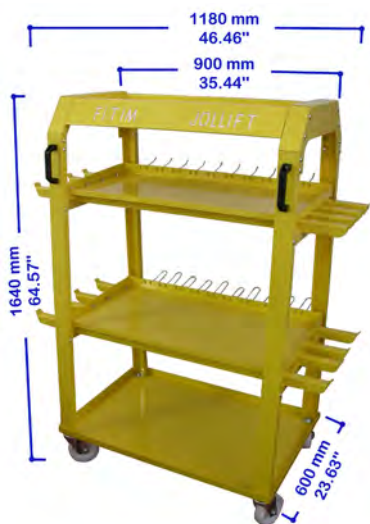

Equipped with 10 single hooks and 10 double hooks for hanging up pull clamps, straps and other accessories




Delivered in a box complete with instructions for quick assembly. Weight 70 kg / 154 lb

LA 125

Multipurpose wheel stands



Comfortable working height for different operations (mounting special clamps, working on rocker panel, adjusting doors, measuring a vehicle with wheels at rest)

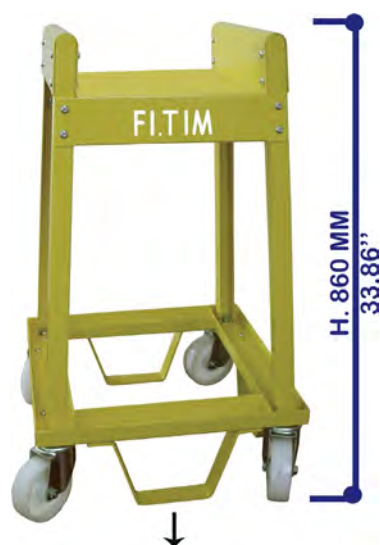

Safety arch against excess load and against damage to the wheels



The set is delivered in 2 boxes each containing 2 pieces, complete with instructions for quick assembly.
Weight of the complete set: 93 kg / 205 lb

3500 kg / 7717 lb

Maximum capacity of the complete LA 125 set (4 wheel stands)

The LA125 wheel stands should be used only with a lift, to centre the vehicle or for other operations with the 4 wheels at rest

**KIT-RB**

Free wheels set, complete with hydraulic foot pump, hydraulic jack, Jollypull Smart Repair bar and other parts.

Wheel lifting supports are needed

**LSPA.104**

Rack for wheel lifting supports on LA.104

**CS.AR**

Stand for wheel lifting supports

**FL/SC90.ORM**

Set of 04 "L" supports for using FL08 and SC19 clamps as horizontal clamps

**JO.M.S.RUB09**

Set of 04 adjustable rubber pads for measuring systems, as a support in conjunction with the clamps **for all bench models**

**JO.SMA**

No. 01 support for front end assembly complete with jack and attachment to the upper platform **for all bench models**

**A.113/900**

Set of 03 pulling straps

**A.113/901**

Ring-shaped tubular strap

**A.116/60**

Self-locking 6ton pulling clamp

**A.117**

Swivel pulling clamp

**A.123**

Swivel pulling clamp

**A.124**

“Slitta” pulling clamp

**A.2501S**

2500 mm 98.42” long chain + hook

ZEROLINE

FI.TIM

Digital tram gauge



Zeroline – length, width, diagonal and height are measured digitally with a numerical accuracy. Zeroline can work with any inclination – by pressing the calibration button you create the zero reference plane even if the car is not in a horizontal position. Suitable for measuring body / front end assembly / wheel alignment etc.



System Multi Level

STEP

Liftable wheel lifting supports which raise the vehicle underside off the lift upper platform, maintaining it level.



MLS VIDEO

<http://www.fitim.com/filmati/video.htm>



STEP VIDEO

<http://www.fitim.com/filmati/videojollift.html>

MLS and STEP

A cutting-edge technology. Made to order.

JOLLIFT

SPAZIOLIFT

Gamma

Jollifast

KITFIX

Multifix

FI.TIM

LIFTS & BENCHES - COLLISION REPAIR

Multiset

***System
Level
Multi***

STEP

jollypull ***master 5000***

FI.TIM

📍 Padova ,Italy

🌐 www.fitim.com

✉ fitim@tin.it

☎ +39 049 8740683